



ELECTRONICS

TO :

DATE : 02. 12. 2005

SAMSUNG TFT-LCD

MODEL NO. : LTG500QV-F03

Customer Approval

Any Modification of Spec is not allowed without SEC's permission.

Approved by : S.C. OH

Mobile Display Business Team

LCD Business

Samsung Electronics Co., LTD.



Contents

Revision History	-----	(3)
General Description	-----	(4)
1. Absolute Maximum Ratings	-----	(5)
1.1 Absolute Ratings Of Environment		
1.2 Electrical Absolute Ratings		
2. Optical Characteristics	-----	(7)
3. Electrical Characteristics	-----	(10)
3.1 TFT-LCD Module		
3.2 Back-Light Unit		
4. Block Diagram	-----	(13)
4.1 TFT-LCD Module		
4.2 Back-Light Unit		
5. Input Terminal Pin Assignment	-----	(14)
5.1 TFT-LCD Module		
5.2 Back-Light Unit		
5.3 The description of MOD Pin Function		
6. Pixel Format	-----	(16)
7. Interface Timing	-----	(17)
7.1 Timing Diagrams of Interface Signal		
8. Reliability Test Results	-----	(20)
8.1 Test Conditions		
8.2 Judgement		
9. Outline Dimensions	-----	(21)
9.1 Module Outline Dimensions		
10. Packing	-----	(23)
11. Marking & Others	-----	(24)
12. General Precautions	-----	(25)
12.1 Handling		
12.2 Storage		
12.3 Operation		
12.4 Others		
Appendix #1 Reference of timing sequence		

Revision History

Data	Rev. No.	Page	Summary
Dec.02.2003	000		Rev.000 was issued.
Dec.02.2005	001		Rev.001 was issued.
		10	Remark caution of image sticking
		11	Including the figures of power sequence and applied voltage
		15	Including the function of Mod Pin
		17	The range of T0 is changed.
		18	Start-up time of STV is included.
19	Including reliability test result.		
App	Including detailed timing sequence.		

General Description

* Description

LTG500QV-F03 is a color active matrix TFT (Thin Film Transistor) liquid crystal display (LCD) that uses amorphous silicon TFT as a switching devices. Customer can use the high quality display. This model is composed of a TFT-LCD Module(TFT-LCD panel, back-light system). The resolution of a 5.0" contains 320 x 240 pixels and can display Analog RGB colors. Also, this model is only for applications in SEC reliability condition. If this model is adopted as applications requiring severe conditions, abnormal display and malfunction may occur.

* Features

- Thin and light weight.
- High Luminance, high contrast ratio.
- Analog Interface(Analog RGB Line inversion Mode).
- Back-light with CCFL.

* Applications

- Display terminal for AV Units(DVD, VTR)
- Portable LCD TV

* General Information

Items	Specification	Unit	Note
Display area	101.76(H) x 76.32(V) (5.0" Diagonal)	mm	
Driver element	a-Si TFT active matrix		
Number of pixels	320(H) x 240(V) (QVGA)	pixel	
Pixel arrangement	RGB vertical stripe		
Dot pitch	0.106(H) x 0.318(V)	mm	Dot
Display mode	Normally White		
Viewing Direction	6:00	o'clock	

* Mechanical Information

Item	Min.	Typ.	Max.	Unit	Note
Size	Horizontal	129.9	130.4	130.9	mm
	Vertical	93.4	93.9	94.4	
	Depth	6.6	7.1	7.6	
Weight	-	-	108	g	

1. Absolute Maximum Ratings


1.1 Absolute Ratings of Environment

Item	Symbol	Min.	Max.	Unit	Note
Storage temperature	T _{STG}	-25	60	°C	(1)
Operating temperature (Ambient temperature)	T _{OPR}	0	50	°C	(1)

Note (1) Temperature and relative humidity range are shown in the figure below.

95 % RH Max. (40 °C > Ta)

Maximum wet - bulb temperature at 39 C or less. (Ta > 40°C) No condensation.

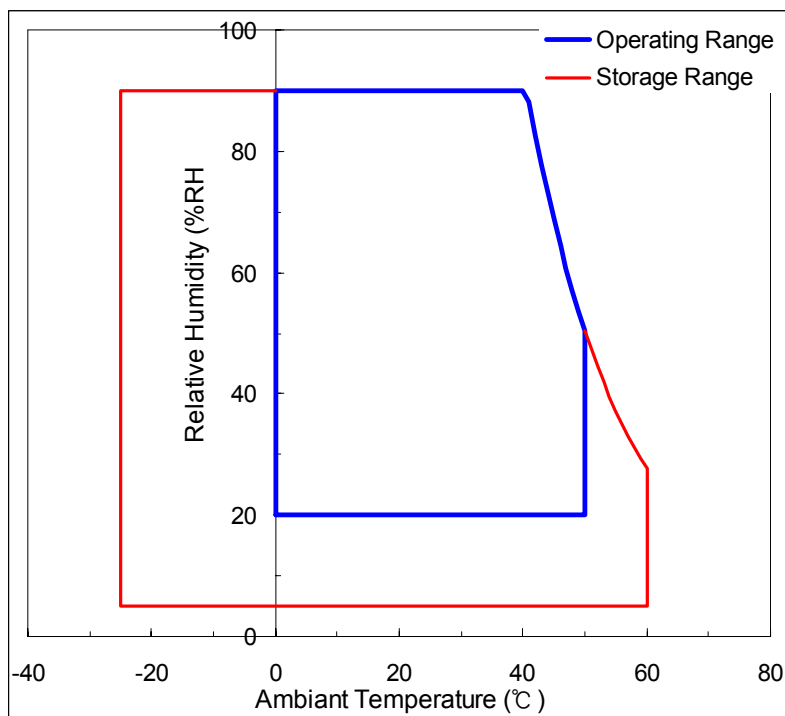

1.2 Electrical Absolute Ratings

(1) TFT-LCD Monitor

($T_a=25\pm 2^\circ\text{C}$, $V_{\text{gg}}=\text{GND}=0\text{V}$)

ITEM	SYMBOL	MIN.	MAX.	UNIT	NOTE
Input Voltage 1	VDD1	-0.3	7.0	V	(1)
Input Voltage 2	VDD2	-0.3	7.0	V	(1)
Input Voltage 3	Von	-0.3	44	V	(1)
Input Voltage 4	Voff	Von-44	VDD1+0.3	V	(1)
Common Voltage	VCOM	-2.0	+6.0	V	(1)

Note (1) Within operating temperature.

(2) Back-Light Unit

ITEM	SYMBOL	MIN.	MAX.	UNIT	NOTE
Lamp Current	I_L	3.0	6.0	mA_{rms}	(1)
Lamp frequency	f_L	40	80	kHz	(1)

Note (1) Permanent damage to the device may occur if maximum values are exceeded. Functional operation should be restricted to the conditions described under normal operating conditions.

2. Optical Characteristics

The following items are measured under stable conditions. The optical characteristics should be measured in a dark room or equivalent state.

- Measuring equipment: BM-5A, PR-650.

(V_{DD1}=3V, V_{DD2}=5V, I_L=5mA_{rms}, f_v=60Hz, f_H=15.734kHz, T_a = 25 ± 2°C)

ITEM		SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	NOTE
Contrast Ratio		CR	$\varphi = 0$ $\theta = 0$	200	-	-		BM-5A (4)-①
Response time at 25 °C	Rising	T _R	Viewing Normal Angle	-	10	-	ms	BM-5A (5)
	Falling	T _F		-	40	-		
Luminance		Y _L	I _L =5mA _{rms}	-	450	-	cd/m ²	BM-5A (4)-②
Color Chromaticity (CIE 1931)	Red	R _X	$\varphi = 0$ $\theta = 0$ Viewing Normal Angle	0.555	0.580	0.605		PR-650 (6)
		R _Y		0.315	0.340	0.365		
	Green	G _X		0.283	0.308	0.333		
		G _Y		0.512	0.537	0.562		
	Blue	B _X		0.128	0.153	0.178		
		B _Y		0.099	0.124	0.149		
	White	W _X		0.285	0.310	0.335		
		W _Y		0.295	0.320	0.345		
Viewing Angle	Hor.	θ_L	CR ≥ 10	-	45	-	Degrees	BM-5A (7)
		θ_R		-	45	-		
	Ver.	φ_H		-	10	-		
		φ_L		-	30	-		


Note (1) The optical characteristics is measured with Back-light.

(2) If product is exposed to high temperatures for extended time, there is a possibility of the polarizer film damage which could degrade the optical characteristics.

Note (3) Test Equipment Setup


After stabilizing and leaving the panel alone at a given temperature for 30 min , the measurement should be executed. Measurement should be executed in a stable, windless, and dark room. 30 min after lighting the back-light. This should be measured in the center of screen..

- Environment condition : $T_a = 25 \pm 2 \text{ } ^\circ\text{C}$

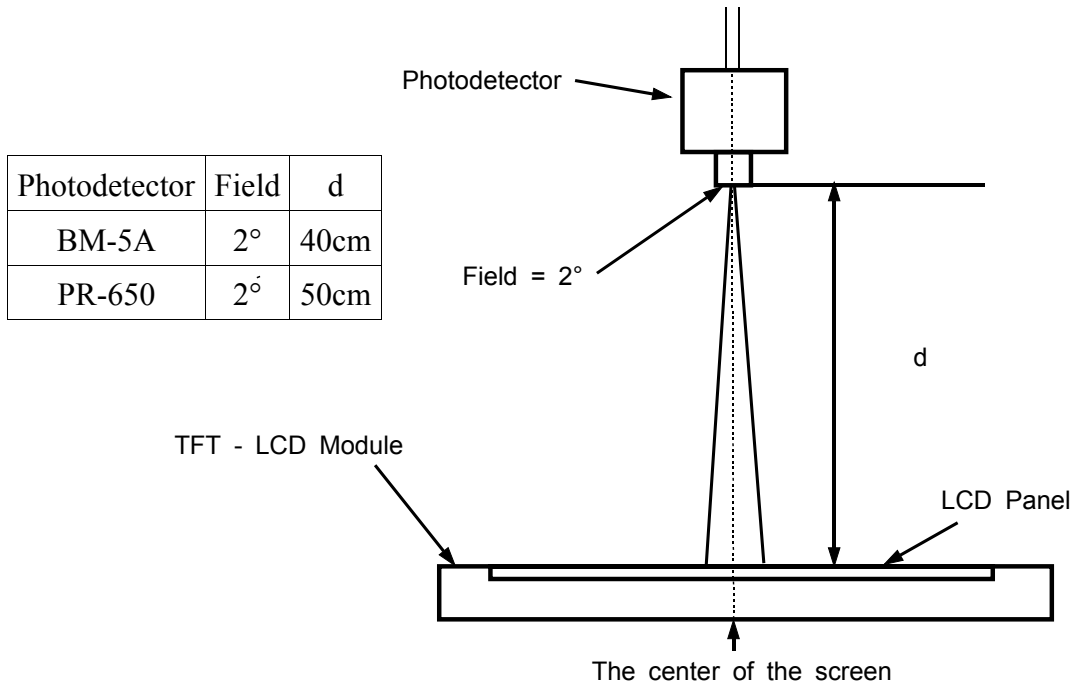

Note (4) Definition of Contrast Ratio, Luminance.

ACTIVE AREA (H:101.76mm/ V:76.36mm)

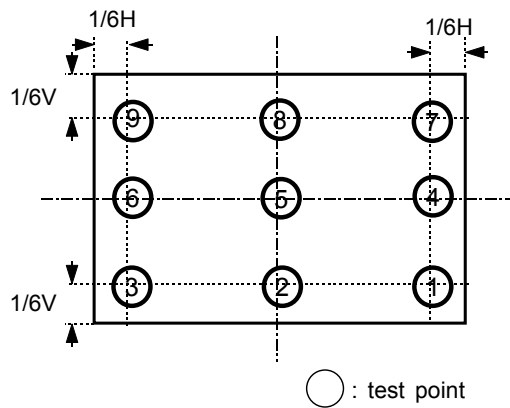

① Definition of Contrast Ratio (CR) : Ratio of gray max (Gmax), gray min (Gmin) at the center point of the panel


$$C/R = \frac{G_{max}}{G_{min}}$$

* Gmax : Luminance with all pixels white

* Gmin : Luminance with all pixels black


② Definition of Luminance : measure the luminance of white at center point of the panel.

Note (5) Definition of Response time : Sum of T_r , T_f .

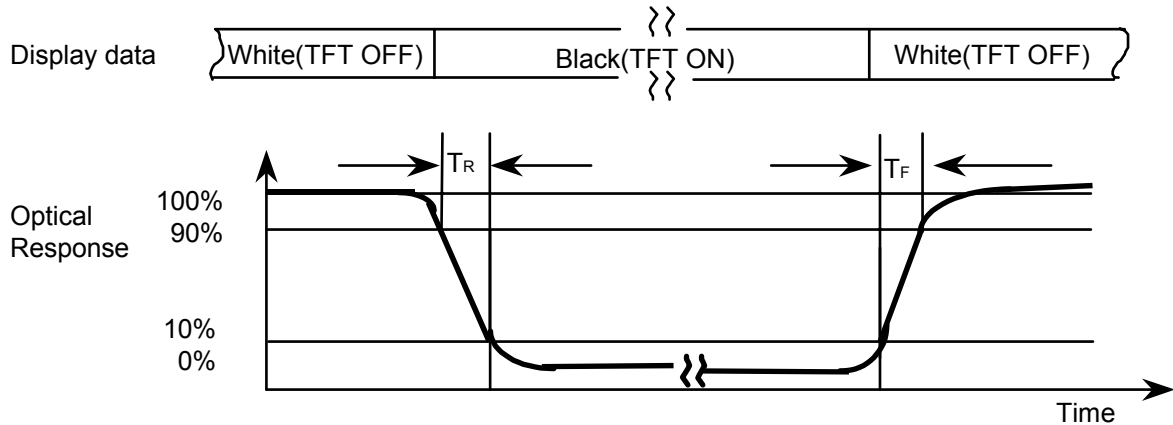

Note (6) Definition of Color Chromaticity (CIE 1931), (Back-light: On) :
Color coordinate of white at center point.

Note (7) Definition of Viewing Angle : Viewing angle range ($CR \geq 10$)

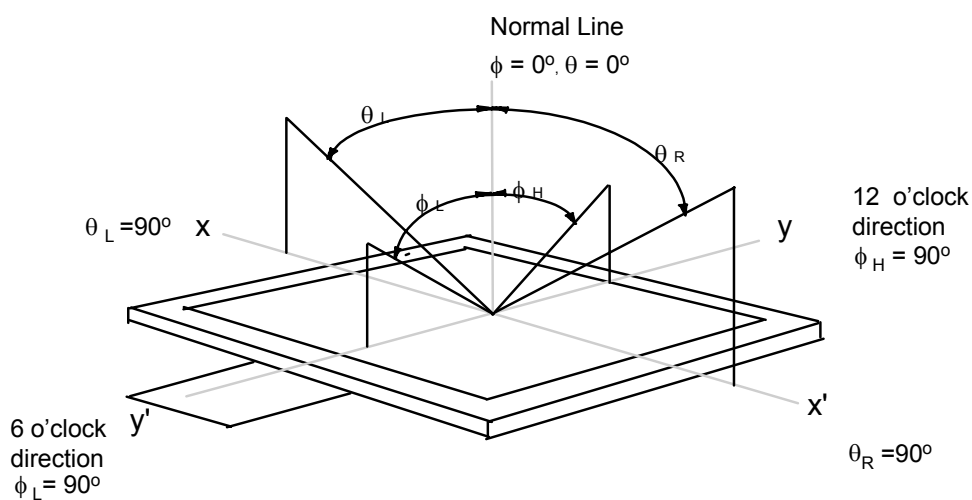

3. Electrical Characteristics

3.1 TFT-LCD Module

(Ta = 25 ± 2°C)

Characteristics		Symbol	MIN.	TYP.	MAX.	Unit	Note
Input Voltage 1		VDD1	2.85	3.0	3.3	V	
Input Voltage 2		VDD2	4.75	5.0	5.25	V	
Input Voltage 3		Von	20	21	22	V	
Input Voltage 4		Voff	-11	-10	-9	V	
Common Voltage (VCOMS, VCOMG)		Center	1.5	2.1	2.5	V	
		AC	4.0	4.8	6.0	Vp-p	
		Frequency	-	7.87	-	kHz	
Rin/Gin/Bin		Black-Black	0.3	0.7/4.3	VDD2-0.3	V	
		White-White	0.3	4.0/1.0	VDD2-0.3	V	
Input Voltage Level		High Level	0.8VDD1	-	VDD1		(3)
		Low Level	0	-	0.2VDD1		
		VBS	1.0	-	3.0		
CPH1, 2, 3		Frequency	-	6.39	-	MHz	
STV		Frequency	-	60	-	Hz	
CPV, OEV, OE		Frequency	-	15.734	-	kHz	
Power Dissipation	White	P _w	-	276	360	mW	(1),(2)
	Black	P _B	-	300	400	mW	

* To prevent a latch-up or DC operation of the LCD module, the power on/off sequence should be as below.(Figure #2)

- Power On : VDD1 → VDD2 → V_{OFF} → V_{ON} → Data
- Power Off : Data → V_{ON} → V_{OFF} → VDD2 → VDD1

Note (1) Operating conditions should be applied. (Please, refer to Appendix 1)

(2) Condition : TFT-LCD module only with typ. electrical characteristics

(3) Maximum Power dissipation check pattern : Black pattern.

(4) CPV, OEV, STV, OE, MOD, CPH1, CPH2, CPH3

(5) If same image is displayed during ten minutes, image sticking may occur.

(In order to prevent image sticking, plz refer to Figure #1)

VK : KICK -BACK VOLTATGE

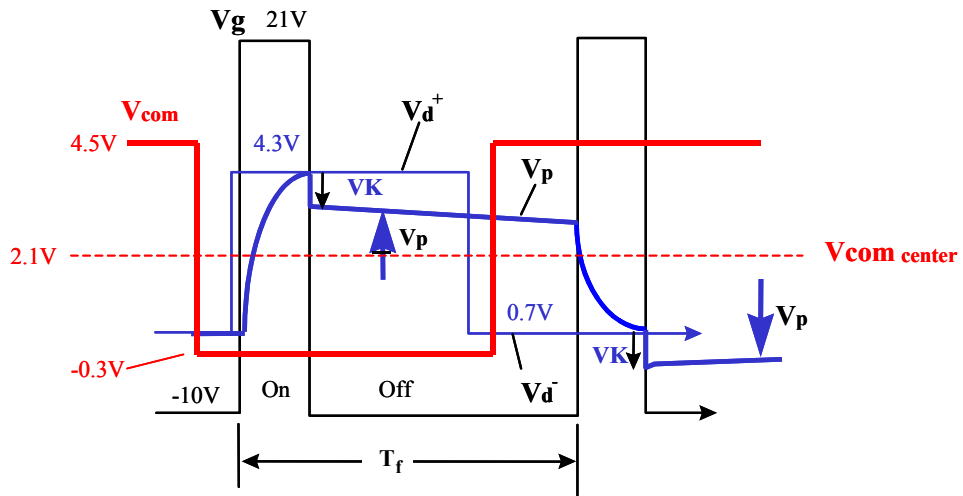


Figure #1

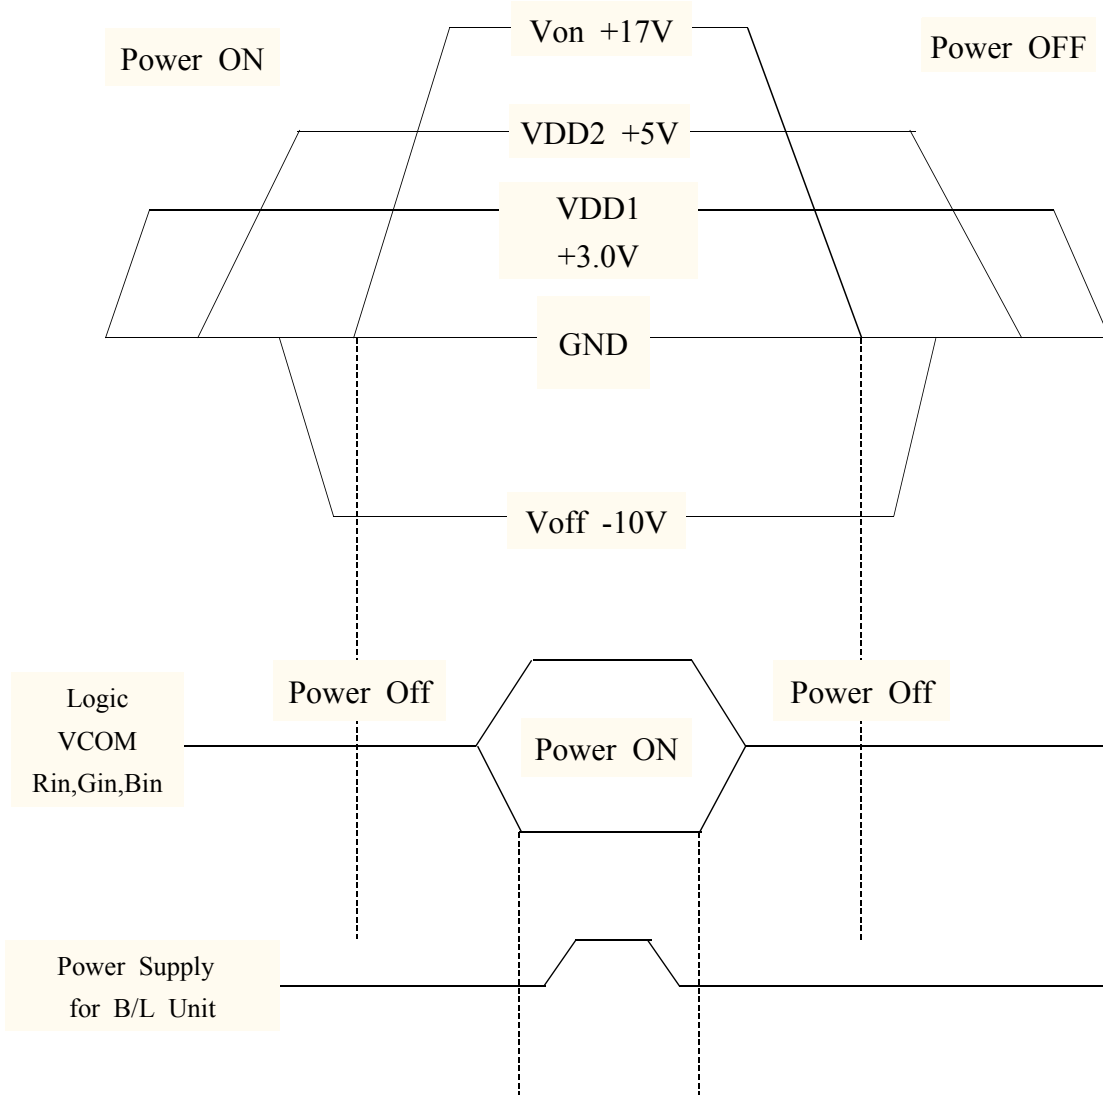


Figure #2

3.2 Back-Light Unit

The back-light system is an edge-lighting type with a single CCFL(Cold Cathode Fluorescent Lamp). The characteristics of a single lamp are shown in the following tables.

(Ta=25 ± 2°C)

Item	Symbol	Min.	Typ.	Max.	Unit	Note
Lamp current	I _L	3.0	5.0	6.0	mArms	(1)
Lamp voltage	V _L	-	675	-	V _{rms}	(1)
Lamp frequency	f _L	40	-	80	kHz	(2)
Operating life time	Hr	10,000	-	-	Hour	(3)
Startup Voltage	V _s	-	-	25°C :1050	V _{rms}	(4),(5)
				0°C :1500		


Note) The waveform of the inverter output voltage must be area symmetric and the design of the inverter must have specifications for the modularized lamp.

The performance of the Back-Light, for example life time or brightness, is much influenced by the characteristics of the DC-AC inverter for the lamp. So all the parameters of an inverter should be carefully designed so as not to produce too much leakage current from high-voltage output of the inverter. When you design or order the inverter, please make sure that a poor lighting caused by the mismatch of the Back-Light and the inverter never occur. When you confirm it, the module should be operated in the same condition as it is installed in your instrument.

Note (1) Lamp current is measured with high frequency current meter as shown below.

Refer to the block diagram of the back-light unit in the next page for more information.

Specified values are for a single lamp.




- (2) Lamp frequency which may produce interference with horizontal synchronous frequency may cause line flow on the display. Therefore lamp frequency should be detached from the horizontal synchronous frequency and its harmonics as far as possible in order to avoid interference.
- (3) Life time (Hr) of a lamp is defined as the time in which it continues to operate under the condition of Ta = 25±2°C and I_L = 5mArms for a lamp until the brightness becomes 50% or lower than it's original value.
- (4) If an inverter has shutdown function, it should keep its output for over 1 second even if the lamp connector is open. Otherwise the lamps may not be turned on.
- (5) For starting the backlight unit, the output voltage of inverter should be larger than the maximum lamp starting voltage.
- (6) Because the inverter uses high voltage, please disconnect it from the power before assembling or disassembling.

4. Block Diagram


4.1 TFT-LCD Module

(INPUT Signal)

#1	GND
#2	VCOMS
#3	GND
#4	STH
#5	VBS
#6	GND
#7	R_IN
#8	G_IN
#9	B_IN
#10	GND
#11	OE
#12	VDD1
#13	MOD
#14	GND
#15	CPH1
#16	CPH2
#17	CPH3
#18	GND
#19	VDD2
#20	VDD2
#21	STV
#22	OEV
#23	CPV
#24	GND
#25	VOFF
#26	GND
#27	VDD1
#28	VON
#29	GND
#30	VCOMG

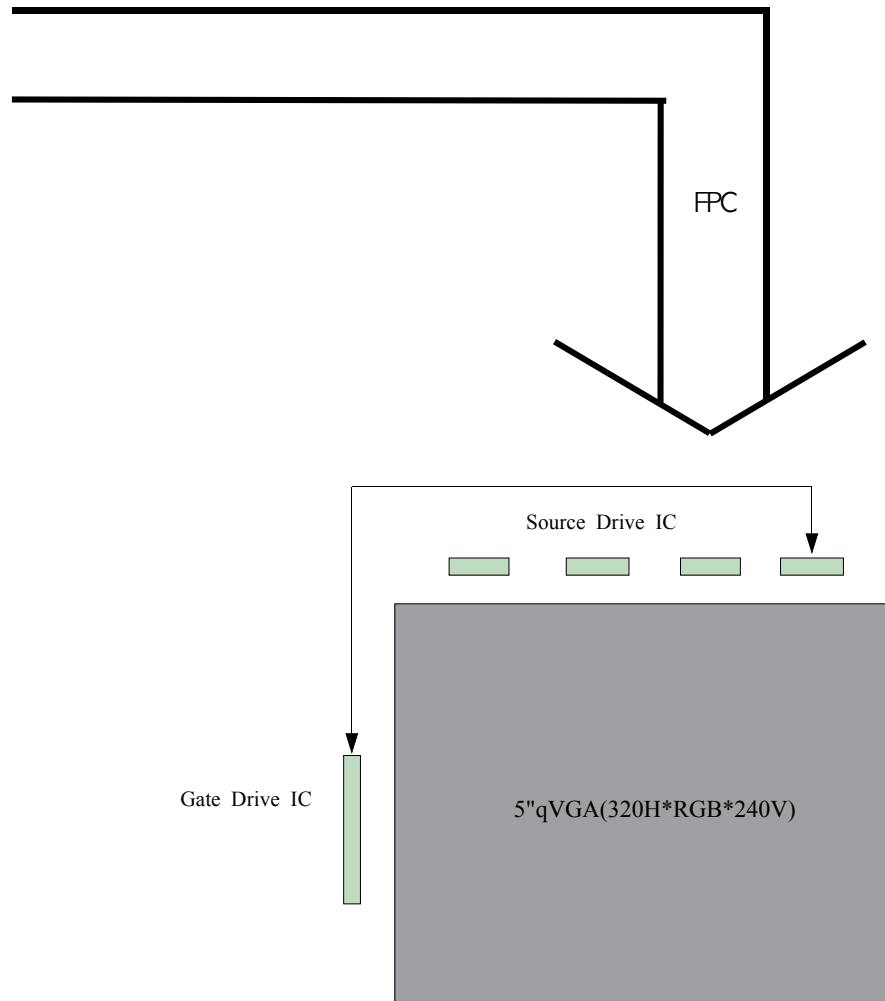

4.2 Back-light Unit

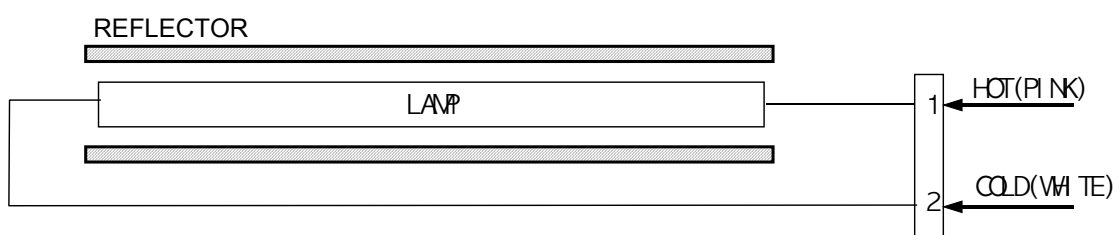

5. Input Terminal Pin Assignment

5.1 TFT-LCD Module

(Connector : 30Pin FPC type ↔UJU 2924A-3003R)

Pin No	Symbol	Description	Remark
1	GND	Ground	-
2	VCOMS	Common Voltage Drive signal(Source Part)	-
3	GND	Ground	-
4	STH	Source Data sampling Start Pulse	-
5	VBS	Source Drive IC output Buffer Control Voltage	-
6	GND	Ground	-
7	R_IN	Analog Red Data Input	-
8	G_IN	Analog Green Data Input	-
9	B_IN	Analog Blue Data Input	-
10	GND	Ground	-
11	OE	Output Enable Signal	-
12	VDD1	Input Voltage 1 (+3.0V)	-
13	MOD	CPH1,2,3 Sampling Mode selection Terminal (High:Simultaneous Sampling / Low:Progressive sampling)	-
14	GND	Ground	-
15	CPH1	Source IC Clock1	-
16	CPH2	Source IC Clock2	-
17	CPH3	Source IC Clock3	-
18	GND	Ground	-
19	VDD2	Input Voltage 2 (+5.0V)	-
20	VDD2	Input Voltage 2 (+5.0V)	-
21	STV	Gate IC Start Pulse	-
22	OEV	GATE IC Output Enable Signal	-
23	CPV	Gate IC Clock	-
24	GND	Ground	-
25	VOFF	Gate IC Output Pulse Low Voltage	-
26	GND	Ground	-
27	VDD1	Input Voltage 1 (+3.0V)	-
28	VON	Gate IC Output Pulse High Voltage	-
29	GND	Ground	-
30	VCOMG	Common Voltage Drive signal(Gate Part)	-

5.2 Back-Light Unit


(Connector : BHSR-02VS-1 ↔ JST SM02B-BHSS-1-TB)

Pin No.	Symbol	Color	Function
1	HOT	PINK	High voltage
2	COLD	WHITE	Low voltage

5.3 The description of MOD Pin Function



Mod Input	MOD Configuration
High(VDD1)	Simultaneous sampling. Please set CPH2 and CPH3 to High
Low(Gnd)	Progressive sampling. Using CPH1, CPH2 and CPH3 for sampling.


6. Pixel Format

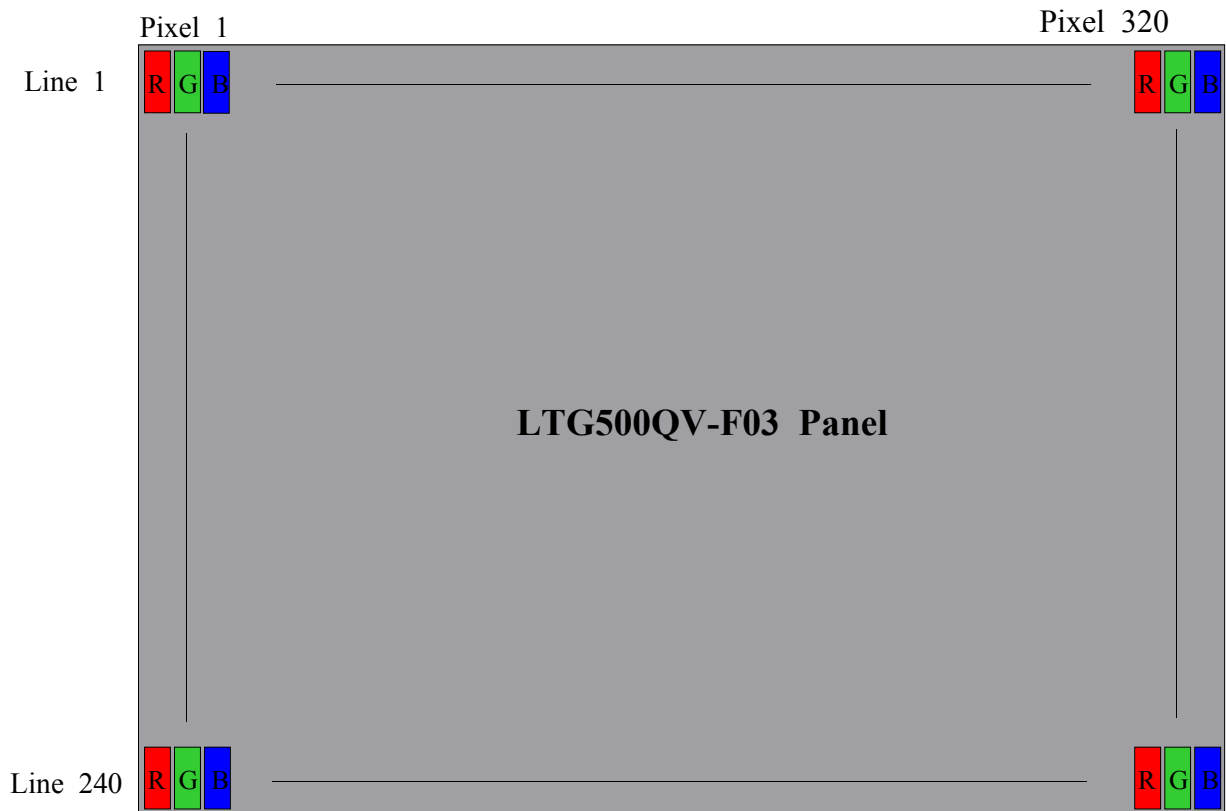

7. Interface Timing

7.1 Timing Diagrams of Interface Signal

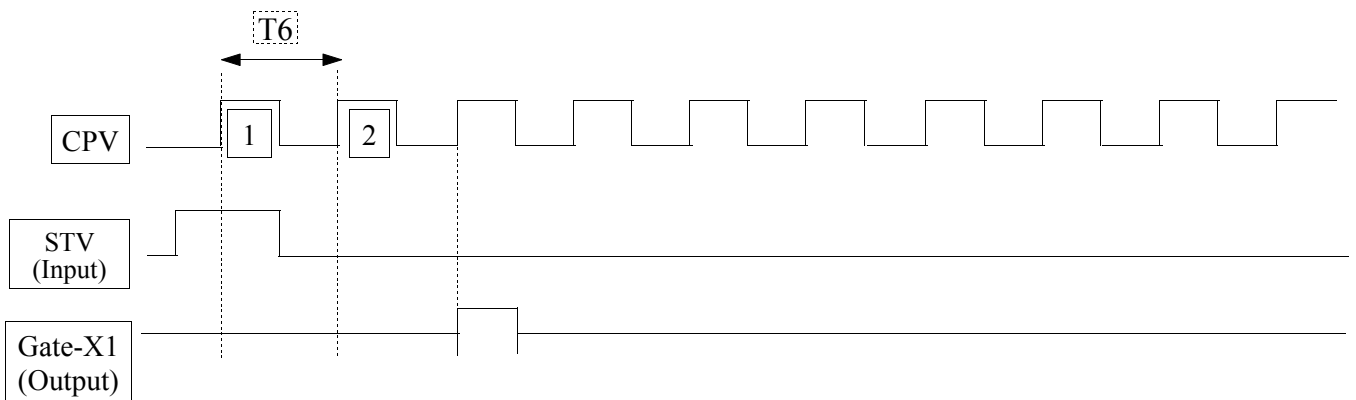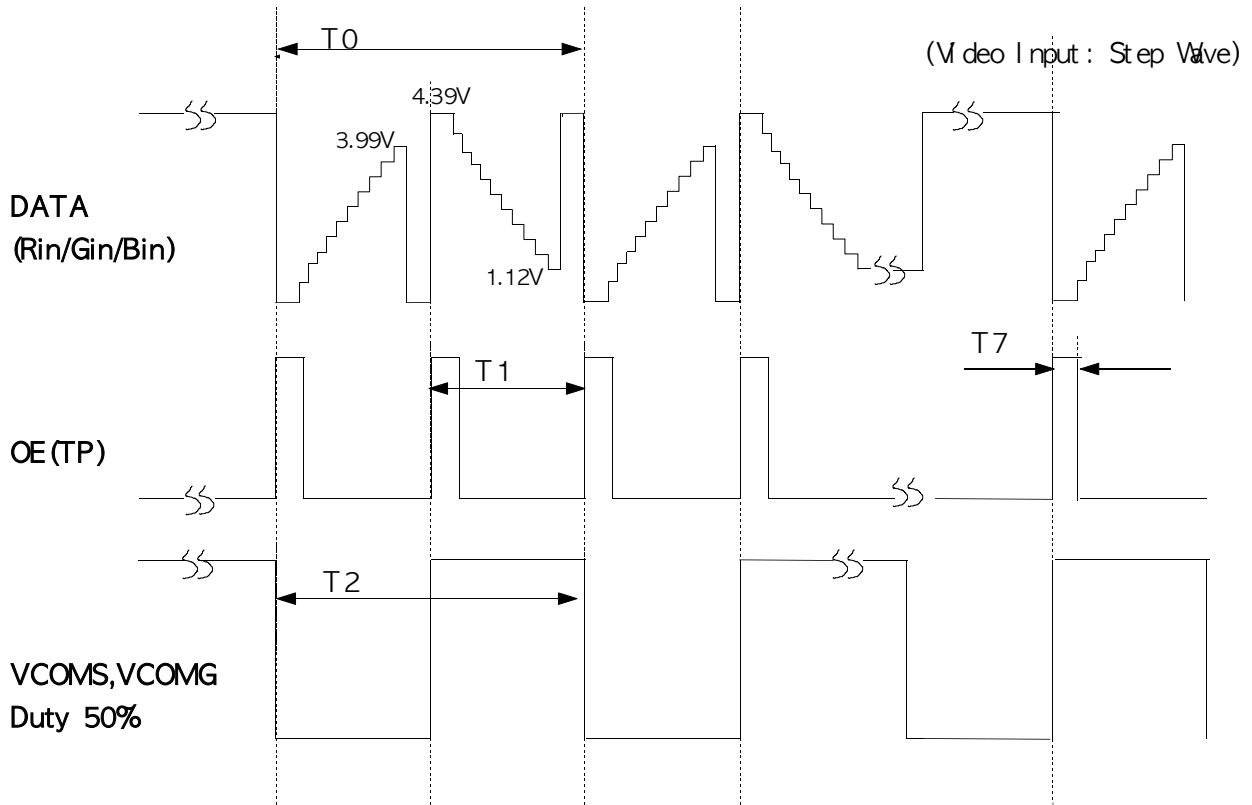

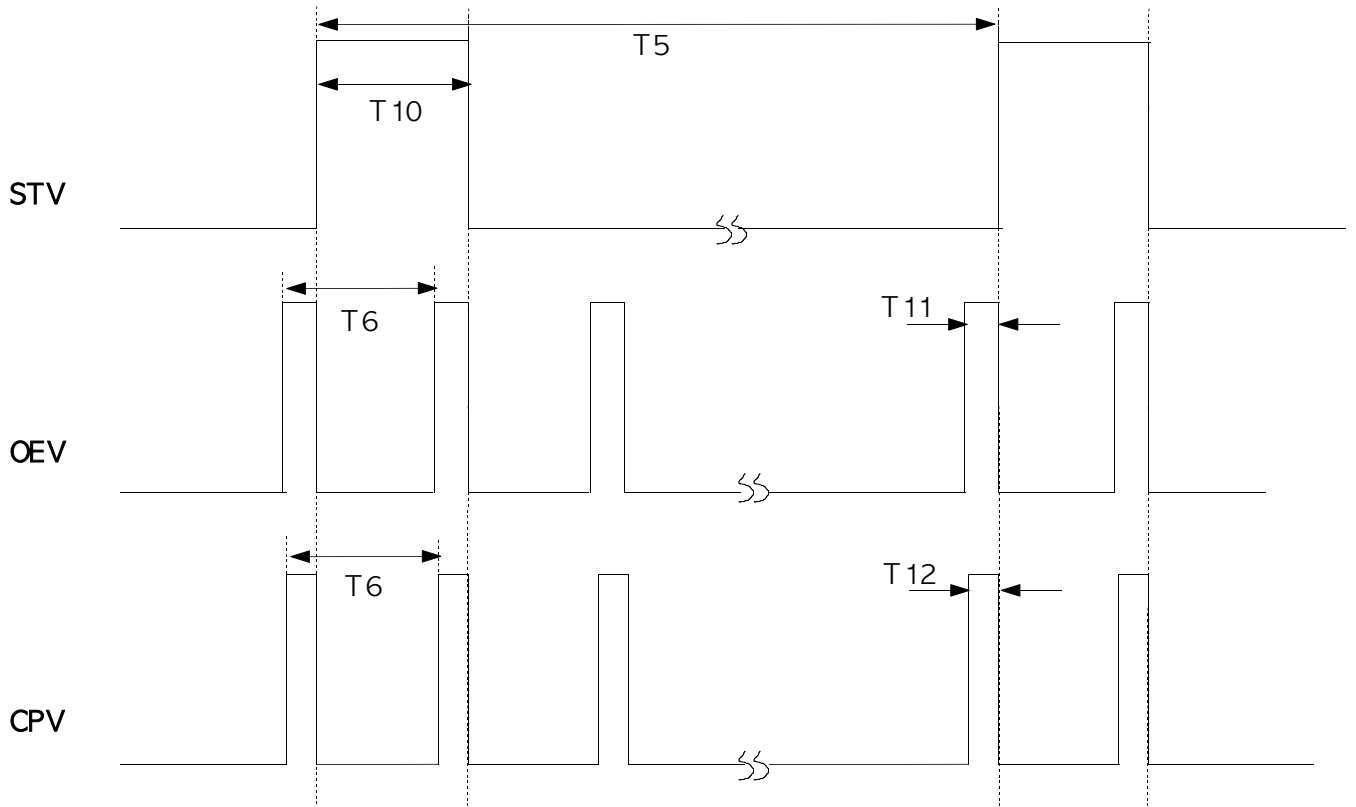

INTERVAL	MIN.	TYP.	MAX.	Unit
T0	-	7.867	-	kHz
T1	-	15.734	-	kHz
T2	-	7.867	-	kHz
T3	-	15.734	-	kHz
T4	-	6.39	-	MHz
T5	-	60	-	Hz
T6	-	15.734	-	kHz
T7	-	8.4	-	us
T8	-	160	-	ns
T9	-	80	-	ns
T10	-	63	-	us
T11	-	10	-	us
T12	-	8	-	us

8. Reliability Test Results

8.1 Test Conditions

ITEM	CONDITION	REMARK
High Temperature Operating Life- test	50℃ , 240HR	
Low Temperature Operating Life- test	0℃ , 240HR	
Temperature Humidity Bias test	40℃ 95%RH, 240HR	
Thermal Cycle Storage test	- 25℃ ⇔ 70℃ , 100CY	
High Temperature Storage test	60℃ , 240HR	
Low Temperature Storage test	- 25℃ , 240HR	
Wet Humidity Temperature Storage test	60℃ 90%RH, 240HR	
Electro-Static Discharge Test	Panel side contact :±8kV, 150pF/330Ω 9POINT 3times/POINT	
	Panel side no contact :±12kV, 150pF/330Ω 9POINT 3times/POINT	
Power On/OFF	- 10℃ ⇔ 60℃ , 5CY	

8.2 Judgement

- > Main LCD should work under the normal condition.
- > During the temperature and humidity test,
the luminance and CR(Contrast Ratio) should not be changed over 50% compared with those before the test.

9. Outline Dimensions

9.1 Module Outline Dimensions




- Refer to the Next Page.



FILE NO.


NO	PART NAME	CODE NO	SPECIFICATION	Q'TY	WEIGHT		UNFOLDED DIM. OF. MATERIAL	REMARK
					FINISH	MATERIAL		
1	OUTLINE DIMENSION		LTG500QV-F03					

20
15
10
5
0

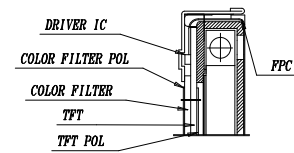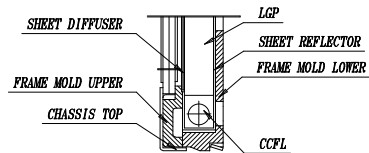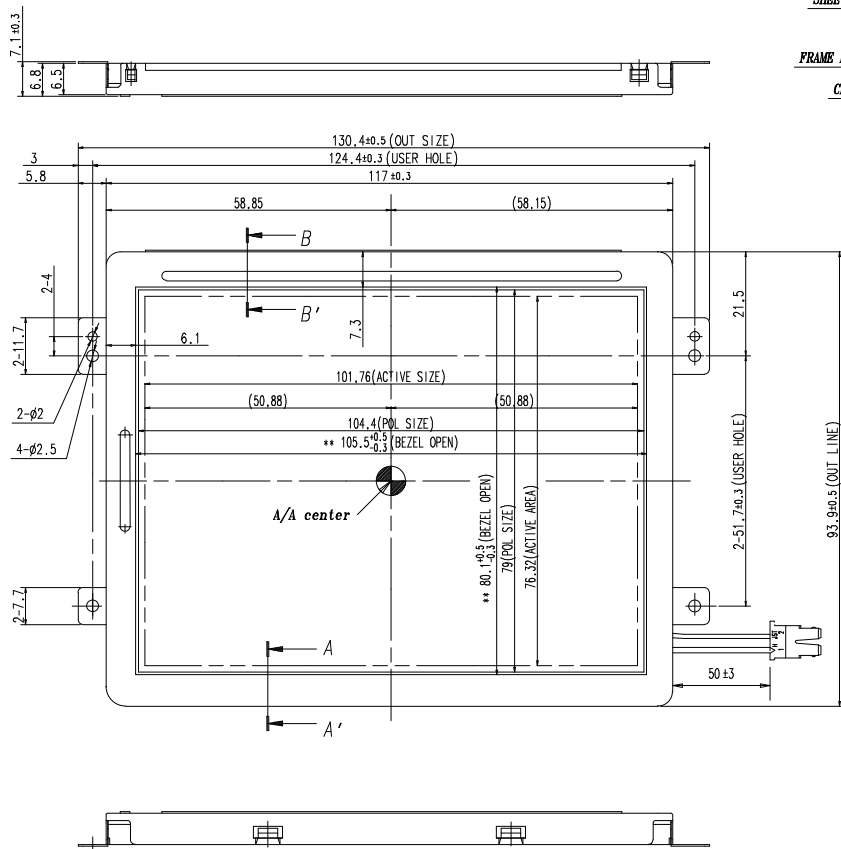

SECTION A-A' (S=2/1)


SECTION B-B' (S=2/1)

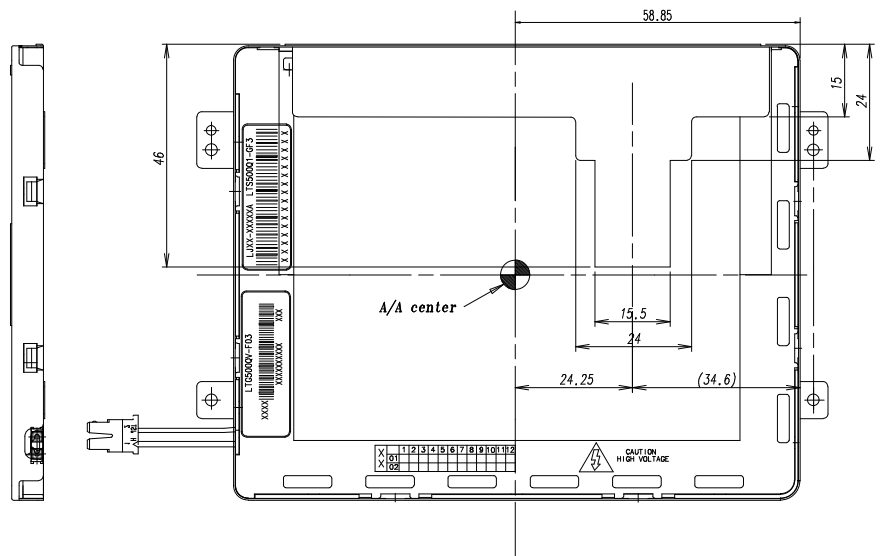

* NOTE
CCFL LAMP CONN. SPECIFICATION.
- MAKER : JST
- PART NO : BHSR-02VS-1

REV	GENERAL TOLERANCE				REV	DATE	DESCRIPTION OF REVISION				REASON	CHK'D BY			
	STEP	LEVEL 1	LEVEL 2	LEVEL 3			UNIT	mm	DRA'N BY	DES'D BY			CHK'D BY	APP'D BY	
	0 < X ≤ 4	±0.05	±0.1	±0.2			SCALE	1/1	K.Y.LEE	D.C.KIM			Y.B.CHU	MODEL NAME	LTG500QV-F03
	4 < X ≤ 16	±0.08	±0.15	±0.3			TOLERANCE	LEVEL 3						'04.04.22	---
16 < X ≤ 64	±0.12	±0.25	±0.5	SAMSUNG ELECTRONICS							CODE NO.				
64 < X ≤ 256	±0.25	±0.4	±0.8								SPEC. NO	-----	VER.	00	

9. Packing

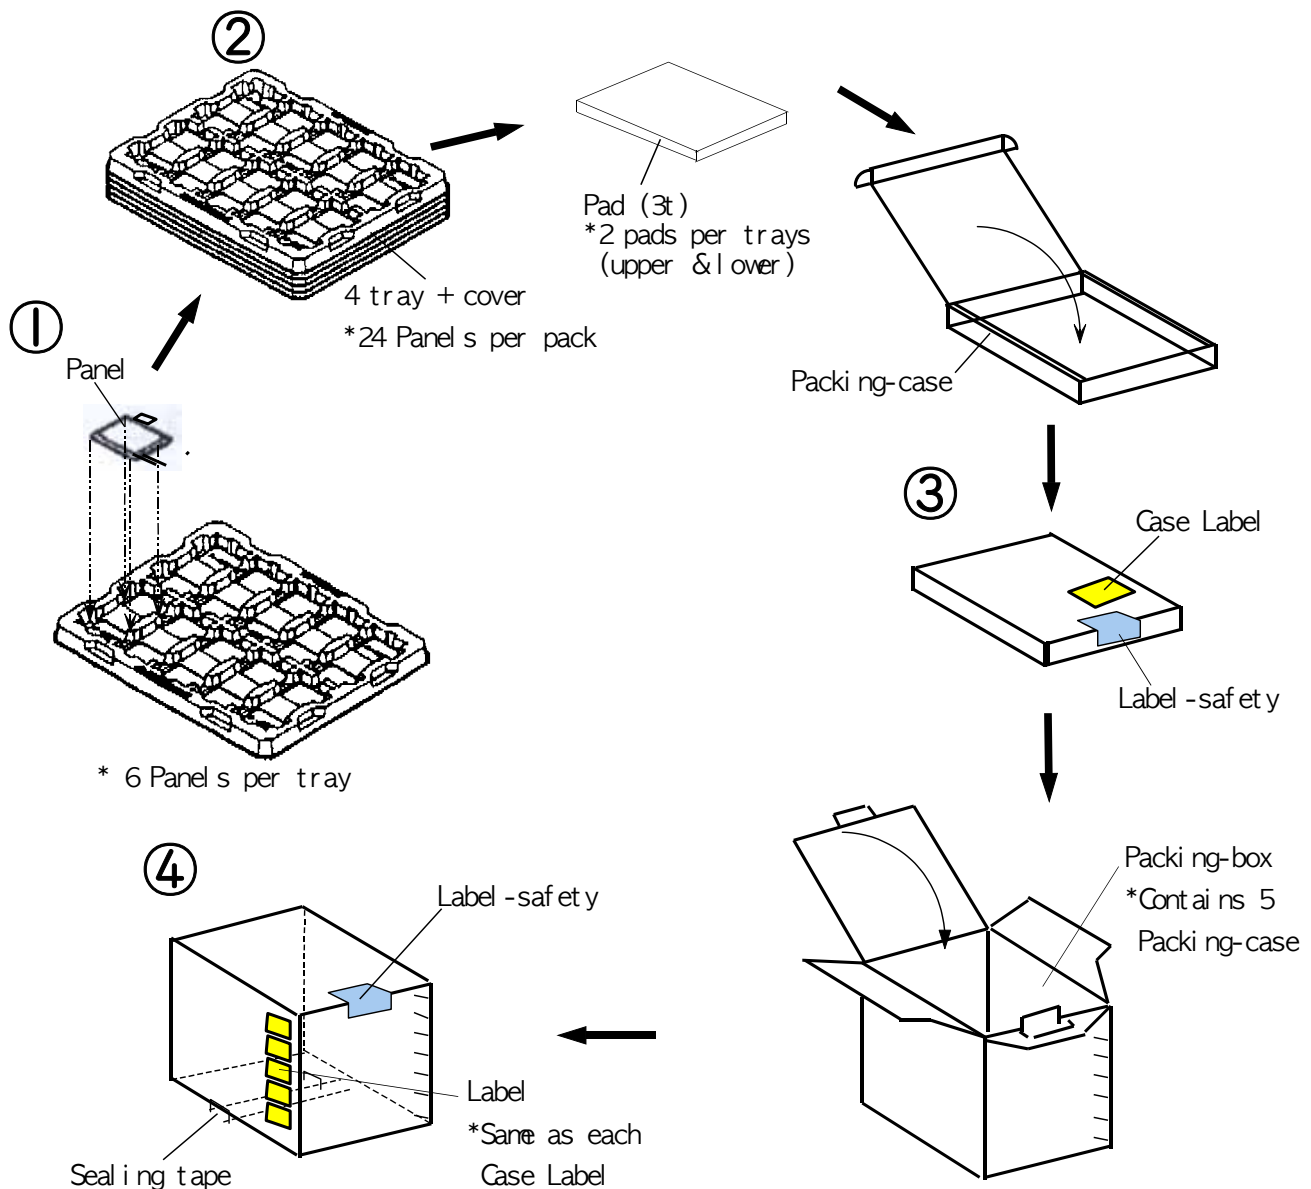

Note (1) Total : Case: Approx. 3.2 Kg

Box: Approx. 17 Kg

(2) Size : Case: 490(W) x 342(D) x 58(H)

Box: 505(W) x 355(D) x 319(H)

(3) Pad Material : Polyethylene Foam T=3.0

(4) Resistance of tray surface : $10^3 \sim 10^6 \Omega$


(5) ESD of tray surface : 20~100V

(6) Place the panels in the tray facing the direction shown in the figure.

(7) Place 4 tray and cover(empty tray) and pads inside the packing-case.


(8) Place 5 packing-case inside the packing-box.(Affix the label)

(9) Seal the packing-box. Affix the label-safety.

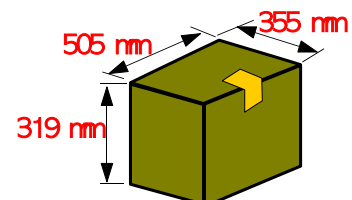


11. Marking & Others

(1) Packing case attach

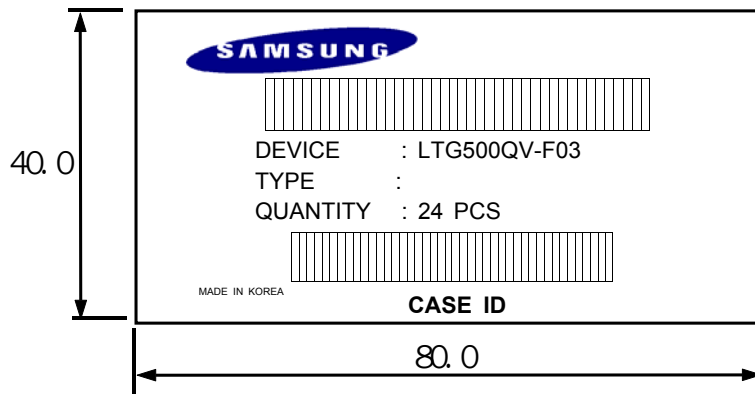

CASE ID : NA 0 00 00001

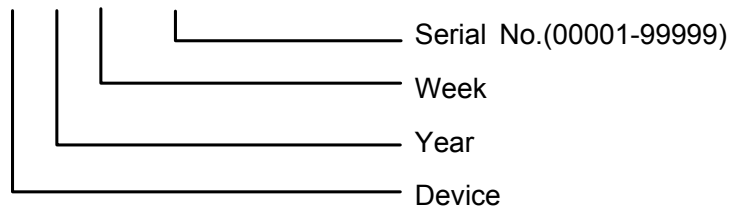

12. General Precautions

12.1 Handling

- (a) When the module is assembled, it should be attached to the system firmly. Be careful not to twist and bend the module.
- (b) Refrain from strong mechanical shock and / or any force to the module. In addition to damage, this may cause improper operation or damage to the module and back-light unit.
- (c) Note that polarizers are very fragile and could be easily damaged. Do not press or scratch the surface harder than a HB pencil lead.
- (d) Wipe off water droplets or oil immediately. If you leave the droplets for a long time, Staining and discoloration may occur.
- (e) If the surface of the polarizer is dirty, clean it using some absorbent cotton or soft cloth.
- (f) The desirable cleaners are water, IPA(Isopropyl Alcohol) or Hexane. Do not use Ketone type materials(ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl chloride. It might permanent damage to the polarizer due to chemical reaction.
- (g) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth . In case of contact with hands, legs or clothes, it must be washed away thoroughly with soap.
- (h) Protect the module from static , it may cause damage to the CMOS Gate Array IC.
- (i) Use finger-stalls with soft gloves in order to keep display clean during the incoming inspection and assembly process.
- (j) Do not disassemble the module.
- (k) Protection film for polarizer on the module shall be slowly peeled off just before use so that the electrostatic charge can be minimized.
- (l) Pins of I/F connector shall not be touched directly with bare hands.

12.2 Storage

- (a) Do not leave the panel in high temperature, and high humidity for a long time. It is highly recommended to store the module with temperature from 0 to 35°C and relative humidity of less than 70%.
- (b) Do not store the TFT-LCD module in direct sunlight.
- (c) The module shall be stored in a dark place. It is prohibited to apply sunlight or fluorescent light during the store.

12.3 Operation


- (a) Do not connect, disconnect the module in the "Power On" condition.
- (b) Power supply should always be turned on/off by the item 3.1 "Power on/off sequence"

12.4 Others

- (a) The liquid-crystal is deteriorated by ultraviolet rays. Do not leave it in direct sunlight and strong ultraviolet rays for many hours.
- (b) Avoid condensation of water. It may result in improper operation or disconnection of electrode.
- (c) Do not exceed the absolute maximum rating value. (the supply voltage variation, input voltage variation, variation in part contents and environmental temperature, and so on)
Otherwise the panel may be damaged.
- (d) If the panel displays the same pattern continuously for a long period of time, it can be the situation when the image "Sticks" to the screen.
- (e) This panel has its circuitry FPC on the bottom side and should be handled carefully in order not to be stressed.


Appendix #1

1- 1 Mbd selection (Mbd : L, Progressive Mode)

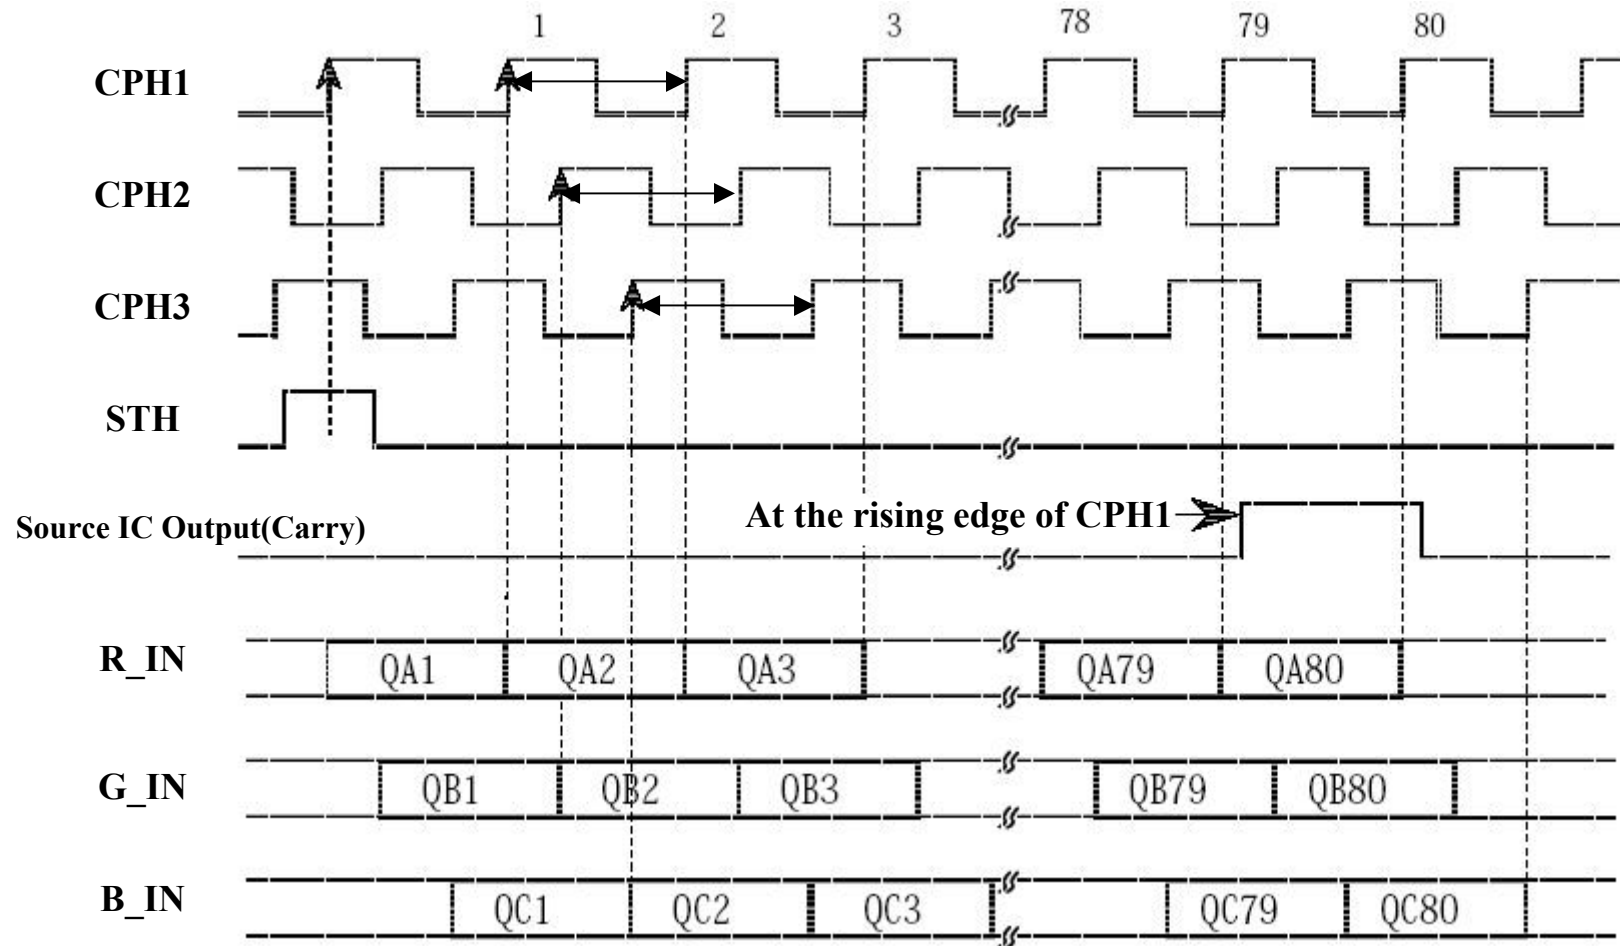


Appendix #1

1-2Mbd selection (Mbd : H, Simultaneous Mode)

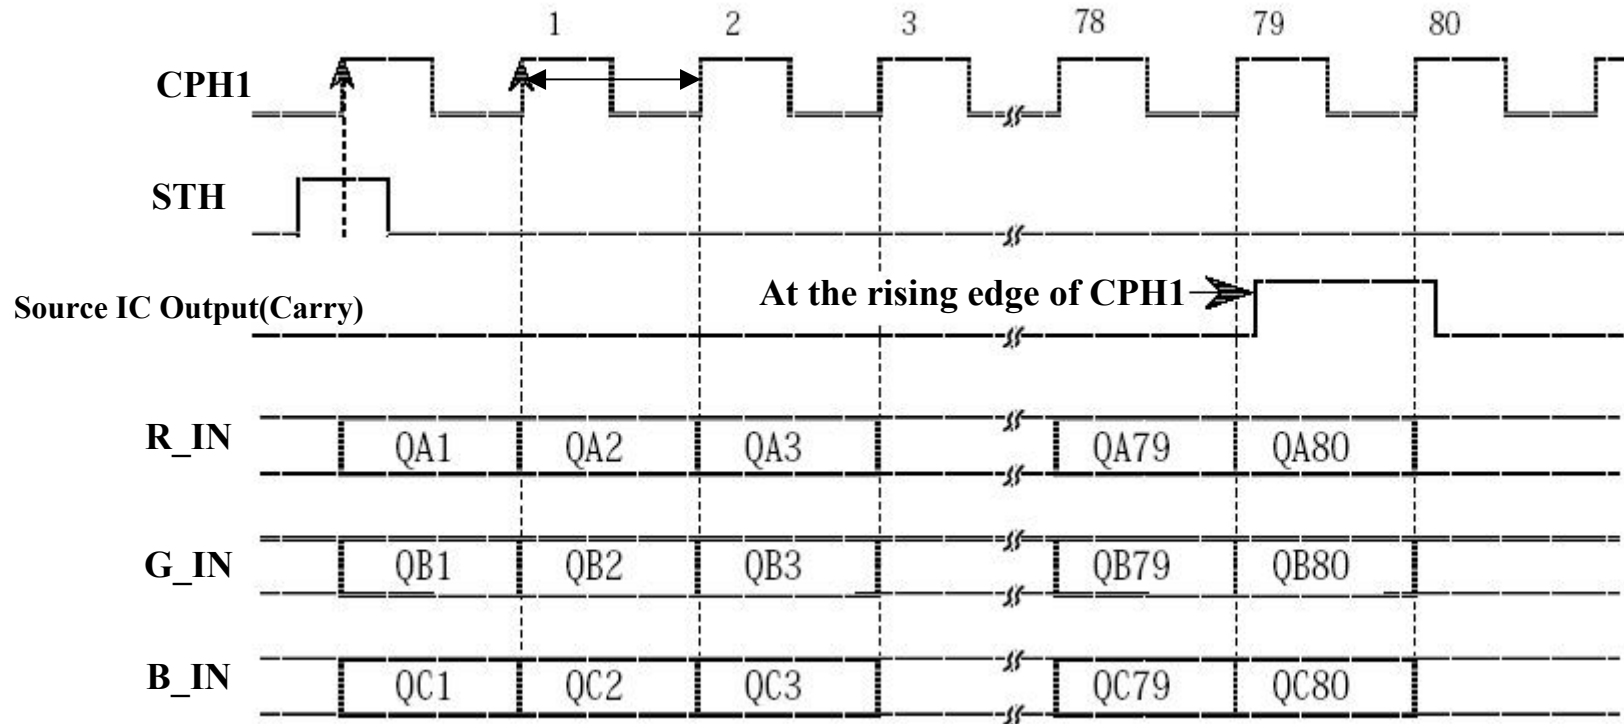

Appendix #1

1-3 Timing sequence

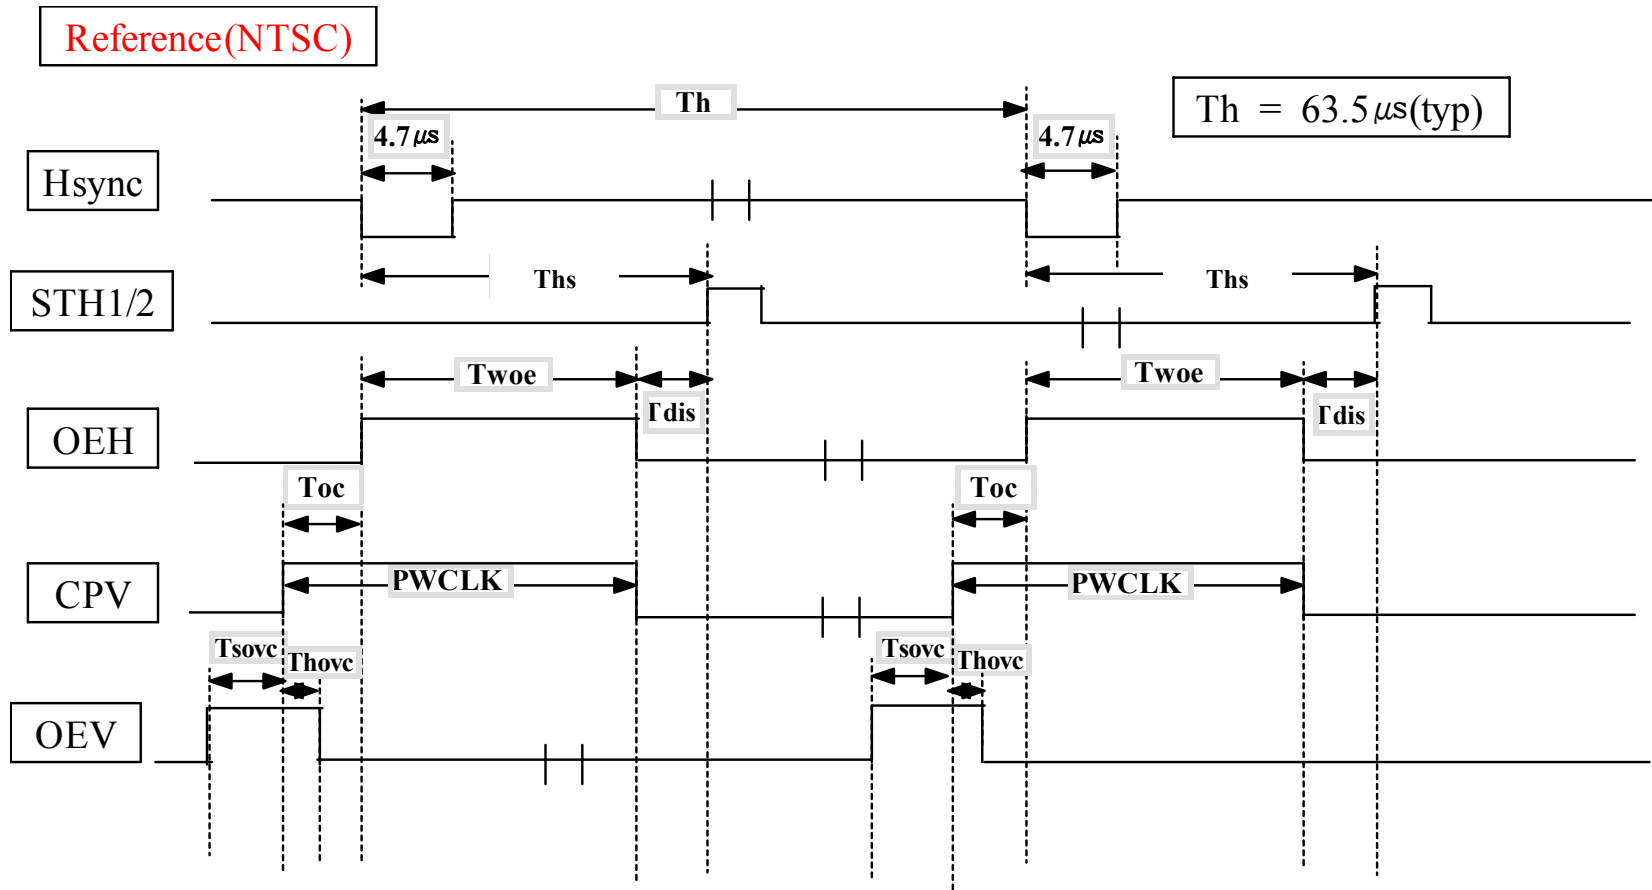

Appendix #1

1- 4 Time table

	Parameter	Symbol	MIN.	TYP.	MAX.	Unit	Condition
Source	STH1/2 period	Th	-	63.5	-	μs	
	Hsync-STH1/2	Ths	9	-	11	μs	
	Sample and hold disable	Tdis	-	0.5	-	μs	OE-STH1/2
	OEH pulse width	Twoe	1	8.4	-	μs	
	OEH period	Th	-	63.5	-	μs	
Gate	CPV period	Th	-	63.5	-	μs	
	Phase difference between	Toc	1	2.3	-	μs	
	CPV pulse width	PWCLK	0.5	10.3	-	μs	
	STVD/STVU period	Th	-	60	-	Hz	
	Phase difference of rising	Tsovc	3	10	-	μs	
	Phase difference of rising	Thovc	1	2.0	-	CPH	
	OEV period	Th	-	63.5	-	μs	