HITACHI

KAOHSIUNG HITACHI ELECTRONICS CO.,LTD P.O. BOX 26-27 2,13TH EAST ST. K.E.P.Z. KAOHSIUNG TAIWAN R.O.C. TEL:(07) 821-5811 (7 LINE) FAX:(07) 821-5815

FOR	MESSRS.	
-----	---------	--

DATE. Mar.06,2009

CUSTOMER'S ACCEPTANCE SPECIFICATIONS

SP14Q002-C1 CONTENTS

No.	ITEM	SHEET No.	PAGE
1	COVER	7B64PS 2701- SP14Q002-C1-9	1-1/1
2	RECORD OF REVISION	7B64PS 2702- SP14Q002-C1-9	2-1/4~4/4
3	GENERAL SPECIFICATION	7B64PS 2703- SP14Q002-C1-9	3-1/1
4	ABSOLUTE MAXIMUM RATINGS	7B64PS 2704- SP14Q002-C1-9	4-1/1
5	ELECTRICAL CHARACTERISTICS	7B64PS 2705- SP14Q002-C1-9	5-1/2~2/2
6	OPTICAL CHARACTERISTICS	7B64PS 2706- SP14Q002-C1-9	6-1/2~2/2
7	BLOCK DIAGRAM	7B64PS 2707- SP14Q002-C1-9	7-1/1
8	INTERFACE TIMING	7B64PS 2708- SP14Q002-C1-9	8-1/3~3/3
9	OUTLINE DIMENSIONS	7B63PS 2709- SP14Q002-C1-9	9-1/2
		7B64PS 2709- SP14Q002-C1-9	9-2/2
10	QUALITY STANDARD	7B64PS 2710- SP14Q002-C1-9	10-1/3~3/3
11	PRECAUTION IN DESIGN	7B64PS 2711- SP14Q002-C1-9	11-1/3~3/3
12	DESIGNATION OF LOT MARK	7B64PS 2712- SP14Q002-C1-9	12-1/1
13	PRECAUTION FOR USE	7B64PS 2713- SP14Q002-C1-9	13-1/1

* When products will be discontinued, customers will be informed by HITACHI with twelve months prior announcement.

ACCEPTED BY;	PROPOSED BY; Jan Ching	

KAOHSIUNG HITACHI	Sh.	7B64PS 2701- SP14Q002-C1-9	PAGE	1-1/1
ELECTRONICS CO.,LTD.	No.	7B04F3 2701-3F14Q002-01-9	FAGL	1-1/1

DATE	SHEET No.			SUM	IMARY	•						
Mar.29.02'	7B64PS-2704- SP14Q002-C1-2	4.2 ENVIRON	MENT	AL ABSOL	UTE I	MAXIMUM	RATING	SS				
	PAGE 4-1/1		ITEM		OPERATING			GE				
					MIN.	MAX.		MAX.				
		Ambient Te	emperati	ıre	0 °C	50 °C		60 ℃				
		7 and one re	on porati		- 0	Note 5						
		↓ Revised										
				RATING	STORA	GE						
			ITEM	-	MIN	MAX	MIN	MAX				
		Ambient T	omnorot	LIFO	-20°C	70°C	-30°C	80°C				
		Ambient T	empera	ure	-20 C	Note 5	-30 C	000				
n 10 02'	=D04D0 0=04	Note 2 Ta at -	√ Re 30°C < 4	vised 48h, at 80)℃ < 16	38h.	DATINO	0				
Apl.19.02'	7B64PS-2704-	4.2 ENVIRONN	VIEN I A	L ABSOL	UIE N	IAXIMUM	KA HNG	S				
	SP14Q002-C1-3	Added:		- احمالهم	ام ۵۲۰	lame						
	PAGE 4-1/1	Note 6 Operation temp not include CFL lamp.										
	7B64PS-2704-	5.1 ELECTRIC		_	1							
	SP14Q002-C1-3	ITEM		SYMB	OL C	CONDITION	TYP.	UNIT				
	PAGE 5-1/1	Recommen	nded LC	VDD-V		n=0°C , <i>φ</i> =0°	22.0	V				
		Driving Vol	tage			=25°C , <i>∲</i> =0°	21.0	V				
		Note 3			Ta=50°C , φ=0° 20.0 V							
				,	↓ Revis	sed		1				
		ITEM		SYMB	SYMBOL CONDITION		TYP.	UNIT				
		Recomme	nded LC	VDD-		a=0°C , φ=0°	(25.0)	V				
		Driving Vo	Itage		-	25°C , <i>∮</i> =0°	(24.0)	V				
		Note 3			Ta=	50°C , <i>∲</i> =0°	(23.0)	V				
		5.2 ELECTRICAND Added: Note: The half CFL:50,000h(A	operati verage	ng life time)	e of bad		₋IGHT					
	7B64PS 2706- SP14Q002-C1-3 PAGE 6-1/2	6.1 OPTICAL CHARACTERISTICS Response(rise) tr:120 → (336) Response(fall) tf:150 → (148)										
							T					
AUHSIUN(G HITACHI DA	TE Mar.06,'09	Sh.	7B64PS 27	02-SP1	4Q002-C1-9	PAGE	2-1				

DATE Mar.06,'09

ELECTRONICS CO.,LTD.

	T	1										
DATE	SHEET No.	/ 4	SUMMARY (40) PACK LIGHT									
Jul.11,'02	7B64PS-2703-	(1	(10) BACK LIGHT Added:									
	SP14Q002-C1-4		The half brightness life time of backlight									
	PAGE 3-1/1		CFL: 50,000h(average)									
	7B64PS-2704-	4	2 ENVIRONMENTAL ABSOLUTE MAXIMUM RATINGS									
	SP14Q002-C1-4	7.										
	PAGE 4-1/1		ITEM OPERATING STORAGE									
				MIN. MAX. MIN. MAX.								
			Ambient Temperature	-20℃	70℃	-30℃	80°	C				
					Note 5							
		'		•	↓ Revised							
			ITEM	OPF	RATING	ST	ORAGE					
				MIN.	MAX.	MIN.	MA	x				
			Ambient Temperature	0℃	50°C	-20°C	60°					
			Ambient Temperature		Note 5	-200						
		No	ote 2 Ta at -30°C<48	h, AT 80	°C < 168h							
		Note 2 Ta at 0°C <48h, AT 60°C < 168h										
	7B64PS 2705-	5.	1 ELECTRICAL CHAP	RACTERIS	STICS							
	SP14Q002-C1-4 PAGE 5-1/1		ITEM	SYMBOL	CONDIT	ION	TYP.	UNIT				
	FAGL 3-1/1		Recommended LC		Ta=0°C ∢	<i>⁄</i> =0°	(25.0)	V				
			Driving Voltage	VDD-V0	Ta=25℃	<i>φ</i> =0 °	(24.0)	V				
			Note 3	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	Ta=50°C	,	(23.0)	V				
			Note 5			φ-σ	(23.0)	V				
				Revised								
			ITEM	SYMBOL	CONDIT	ION	TYP.	UNIT				
			Recommended LC	_	Ta=0°C <i>¢</i>	⁄=0°	22.0	V				
			Driving Voltage	VDD-V0	Ta=25°C <i>∲</i> =0°		21.0	V				
			Note 3		Ta=50°C <i>∮</i> =0°		20.0	V				
			1 1 100 100 (010)	(0.4	0)) /							
		INC	ote 4 VDD-V0=(24.0)	$V \rightarrow (21.$	U)V							
		5	2 ELECTRICAL CHAF	RACTERIS	STICS OF F	BACKLIC	:HT					
		5.2 ELECTRICAL CHARACTERISTICS OF BACKLIGHT Starting discharge voltage min. (1000) → 1000										
				J (. 5 - 5 ,							
		De	eleted :									
		No	ote The half brightnes	s life time	of backligh	nt.						
	CFL: 50,000h(average)											

Sh.

No.

7B64PS 2702-SP14Q002-C1-9

DATE | Mar.06,'09

PAGE | 2-2/4

KAOHSIUNG HITACHI

ELECTRONICS CO.,LTD.

DATE	SHEET No.		SUMM	ARY						
Jul.11,'02	7B64PS-2706-	6.1 OPTICAL CHARACT								
	SP14Q002-C1-4	Revised								
	PAGE 6-1/2		esponse(rise) tr : $(336) \rightarrow 120$							
		Response(fall) tf: (148)	→ 150							
Jul.16,'02	7B64PS-2703-	(10).Back Light Type	,							
	SP14Q002-C1-5	Cold cathode fluores		•						
	PAGE 3-1/1	The half brightness lif CFL : 50,000h(average		backlight						
		Vi L : 30,000in(averag	<i>je)</i>							
		Cold cathode fluores	scent lam	D.						
		CFL life time : 50,000		•						
		Note : CFL life time =	, -	,	CFL brigh	htness.				
	7B64PS-2709-	9.1 DIMENSIONS OUTL	NE							
	SP14Q002-C1-5	Dimensions express re	evised							
	PAGE 9-1/2									
	7B64PS-2709-	9.3 INTERFACE PIN CO								
	SP14Q002-C1-5	1.LCM I/F1 Revised —		CN1						
	PAGE 9-2/2	2.LCM CFL Revised =	LCM (CN2						
	7B64PS-2710-	10.2 DEFINITION OF EA	CH ZONE	-						
	SP14Q002-C1-5	B zone : edge line of L	•							
	PAGE 10-1/3	↓ Revised								
Jul.18,'02	7B64PS-2704-	B zone: Window of Moderate A.2 ENVIRONMENTAL			IIIM DAT	INICS				
Jul. 10, 02	SP14Q002-C1-6	4.2 ENVIRONMENTAL	ABSOLUI		IOW KAT	INGS				
	PAGE 4-1/1	ITEM	OPER	ATING	STOF	RAGE				
	1 //OL 4 1/1		MIN.	MAX.	MIN.	MAX.				
		Ambient Temperature	0℃	50 ℃	-20 ℃	60℃				
			,	Revised						
		ITEM	OPER	ATING	STOF	RAGE				
			MIN. MAX. MIN. MAX.							
		Ambient Temperature -20°C 70°C -30°C 80°C								
		Note 2 Ta at -20℃ < 48h ↓ Revis Note 2 Ta at -30℃ < 48h	ed							

KAOHSIUNG HITACHI		Mar.06,'09	Sh.	7B64PS 2702-SP14Q002-C1-9	DAGE	2 2/4
ELECTRONICS CO.,LTD.	DATE	Mai.00, 09	No.	7B04P3 2702-SP14Q002-C1-9	PAGE	2-3/4

DATE	SHEET No.		SUMMARY									
Feb.25,'04	7B64PS-2706-	6.1 O	6.1 OPTICAL CHARACTERISTICS									
	SP14Q002-C1-7	Revis	Revised Response Time (Rise) tr : 120 → 336									
	PAGE 6-1/2	Respo										
	. , , , , , , , , , , , , , , , , , , ,	Respo	onse Time (Fall) tf: 1	50 → 1 ⁴	18							
	7B64PS-2708-	8.3 P	8.3 POWER ON/OFF TIMING SEQUENCE									
	SP14Q002-C1-7	Revis	ed									
	PAGE 8-3/3	tDLD	: min. $200 \rightarrow 50$									
	71020070	tCH:	max. $200 \rightarrow 30$									
May.14,'04	7B64PS2705	5.1 E	LECTRICAL CHARA	CTERIS	ΓICS							
	SP14Q002-C1-8	Adde	d									
	PAGE 5-1/2		ITEM	SYMBOL	MIN.	TYP.	MAX					
			Power Supply Voltage Logic	VDD-VSS	3.2	3.3	3.4					
			,,,,		21.0	22.0	23.0					
			Recommend LC Driving Voltage	VDD-VO	20.0	21.0	22.0					
			ŭ ŭ		19.0	20.0	21.0					
	7B64PS2705	5 2 FI	LECTRICAL CHARA	CTERIST		l .						
		Cance		-	.55 01	<i>_,</i> (0)(L	. •					
	SP14Q002-C1-8		5:When ICFL is used	over 5.5 r	mA it ma	av cause	uneven					
	PAGE 5-2/2		ast near CFL location		•	•						
	7B64PS 2706-	-	PTICAL CHARACTE	•	-			-				
		Adde			· · ·							
	SP14Q002-C1-8		_CD driving voltage	should b	e adius	ted at th	the voltage					
	PAGE 6-2/2		e the peak contrast		-			J -				
	7B64PS 2710-	-	APPEARANCE INSF			TION						
			sed 45°→25°									
	SP14Q002-C1-8											
	PAGE 10-1/3											
Mar.06,'09	7B64PS2712		ESIGNATION OF LO									
	SP14Q002-C1-9	Revis	ed reversion from R	EV. — to	REV.B							
	PAGE 12-1/1											
		1	12. 1				T					
	G HITACHI DAT	ΓF Mai	r.06,'09 Sh. 7B64P	S 2702-SF	P14Q002	-C1-9 P	AGE 2	-4/				
LECTRON	ICS CO.,LTD.	'VIGI	No. 10041	S = 1 0 = 01	1 1 0002	J. J		17				

3. GENERAL SPECIFICATIONS

(1) Part Name SP14Q002-C1

(2) Module Size 167.0(W)mm×109.0(H)mm×10.0 (D)mm(max.)

(3) Effective Display Area 120(W)mm min. × 89(H)mm min.

(4) Dot Size 0.345(W)min. × 0.345(H)min.

(5) Dot Pitch 0.360(W)mm × 0.360(H)mm

(6) Dot Number (Resolution) 320 (W) × 240 (H) dots

(7) Duty Ratio 1/240

(8) LCD Type Transmissive type F-STN

With glare type upper polarizer

(9) Viewing Direction 6 O'clock

(10) Back Light Type Cold cathode fluorescent lamp.

CFL life time: 50,000h(average)

Note: CFL life time = life time for half of CFL

brightness.

4. ABSOLUTE MAXIMUM RATINGS

4.1 ELECTRICAL ABSOLUTE MAXIMUM RATINGS

ITEM	SYMBOL	MIN.	MAX.	UNIT	COMMENT
Power Supply for Logic	VDD-VSS	0	6.0	V	
Power Supply for LC Driving	VDD-VEE	0	27.5	V	
Input Signal Voltage	Vi	-0.3	VDD+0.3	V	Note 1
Input Signal Current	li	0	1	Α	
Static Electricity	VESD0	-	±100	V	Note 2,3,4
	VESD1	-	±10	kV	Note 2,3,5

VSS=0V: STANDARD

Note 1: DISP.OFF, FRAME, LOAD, CP, D0~D3.

Note 2: Make certain you are grounded when handling LCM.

Note 3 : Energy storage capacitance 200pF , discharge resistance 250 Ω Ta=25 $^{\circ}$ C , 60%RH.

Note 4: Contact discharge to I/F connector pins.

Note 5: Contact discharge to front metal bezel.

4.2 ENVIRONMENTAL ABSOLUTE MAXIMUM RATINGS

ITEM	OPERATING		STORAGE		OMMNT
	MIN.	MAX.	MIN.	MAX.	
Ambient Temperature	-20 ℃	70 ℃	-30 ℃	80 °C	Note 2,3,7
Humidity	Not	e 1	No	te 1	Without Condensation
		2.45m/s ²		11.76m/s ²	
Vibration	-	(0.25G)	-	(1.2G)	Note 4
				Note 5	1h max.
		29.4m/s ²		490.0m/s ²	
Shock	-	(3 G)	-	(50 G)	X · Y · Z Directions
				Note 5	
Corrosive Gas	Not Accep	table	Not Accep	table	

Note 1 Ta ≤ 40°C : 85%RH max.

Ta>40°C : Absolute humidity must be lower than the humidity of 85%RH at 40°C

Note 2 Ta at -30° C -----< 48h, at 80° C < 168h.

Note 3 Background color changes slightly depending on ambient temperature. This phenomenon is reversible.

Note 4 5Hz~100Hz (Except resonance frequency)

Note 5 This module should be operated normally after finish the test.

Note 6 When LCM will be operated at 0° C, the life time of CFL will be reduced. Please make sure that characteristics of the inverter meet the CFL specification.

Note 7 Operation temp not include CFL

KAOHSI	UNG HITACHI	DATE	Mar.06,'09	Sh.	7B64PS 2704-SP14Q002-C1-9	PAGE	4-1/1
ELECTR	ONICS CO.,LTD.			No.	750 11 0 27 0 1 01 1 1 Q 0 0 2 0 1 0	. ,	, .

5. ELECTRICAL CHARACTERISTICS

5.1 ELECTRICAL CHARACTERISTICS

ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT
Power Supply Voltage	VDD-VSS		4.75	5.0	5.25	V
for Logic	VDD-V33	,	3.2	3.3	3.4	V
Power Supply Voltage for LC Driving	VEE-VSS	-	-23.1	-22.0	-20.9	V
Input Signal Voltage	Vi	H LEVEL	0.8VDD	ı	VDD	V
Note 1	VI	L LEVEL	0	ı	0.2VDD	V
Power Supply Current	IDD	VDD-VSS=5.0V	-	6.0	-	mA
for Logic Note 1	טטו	VEE-VSS= -22.0V				
Power Supply Current	IEE	VDD-VSS=5.0V	-	5.0	-	mA
for LC Driving Note 2	ICC	VEE-VSS= -22.0V				
Recommended LC		Ta= 0°C , <i>φ</i> = 0°	21.0	22.0	23.0	V
Driving Voltage	VDD-V0	Ta=25 $^{\circ}$ C , ϕ = 0 $^{\circ}$	20.0	21.0	22.0	V
Note 3		Ta=50°C , <i>∮</i> = 0°	19.0	20.0	21.0	V
FRAME Frequency Note 4	fFRAME	-	70	75	80	Hz

Note 1 DISP.OFF, FRAME, LOAD, CP, D0~D3.

Note 2 : FLM=75Hz , test pattern is all "Q". VDD-V0=21.0V , $Ta=25^{\circ}C$

Note 3 : Recommended LC driving voltage may fluctuate about $\pm 1.0 V$ by each module. Test pattern is all "Q"

Note 4: Please set the frame frequency so as to avoid flicker and rippling on the display.

5.2 ELECTRICAL CHARACTERISTICS OF BACKLIGHT

ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT	NOTE
Lamp Voltage	VL	1	(300)	1	Vrms	Ta=25°ℂ
Frequency	fL	-	70	85	kHz	Ta=25°ℂ
Lamp Current	IL	4	5	6	mArms	Ta=25°ℂ
Starting Discharge Voltage	VS	1000	-	-	Vrms	Ta=25°ℂ

KAOHSIUNG HITACHI	DATE	Mar.06,'09	Sh.	7B64PS 2705-SP14Q002-C1-9	PAGE	5 1/2
ELECTRONICS CO.,LTD.	DATE	IVIAI.00, 09	No.	7B04F3 2703-3F 14Q002-C1-9	I AGE	J-1/Z

- Note 1: Please make sure that your inverter is designed to meet the above specifications.
- Note 2 :Starting discharge voltage is increased when LCM is operating at lower temperature, please check the characteristics of your inverter, so as to ensure discharge at low temperature.
- Note 3 : Average life time of CFL will be decreased when LCM is operating at lower temperature.
- Note 4: Lower driving frequency of CFL inverter may cause mechanical noise of the backlight system.

 Before designing the inverter, please consider the driving frequency of noise.

KAOHSIUNG HITACHI		 Sh.			
ELECTRONICS CO.,LTD.	DATE	No.	7B64PS 2705-SP14Q002-C1-9	PAGE	5-2/2

6. OPTICAL CHARACTERISTICS

6.1 OPTICAL CHARACTERISTICS OF LCD

SYMBOL

 $\phi 2 - \phi 1$

K

tr

tf

CONDITIONAL

K≥2.0

, θ=0°

 $\theta = 0^{\circ}$

 $\theta = 0^{\circ}$

φ=0°

φ=0°

 $\phi=0^{\circ}$

ITEM

Viewing Area

Contrast Ratio

Response Time (Rise)

Response Time (Fall)

Note 1. Definition of θ and ϕ

-				
MIN.	TYP.	MAX.	UNIT	NOTE
ı	40	-	deg	1,2
ı	25	-	ı	3
-	336	_	ms	4

4


ms


(Measure condition by HITACHI)

148


Note 3. Definition of contrast "K"


K= Brightness on selected dot (B1)
Brightness on non-selected dot (B2)

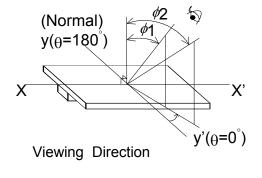

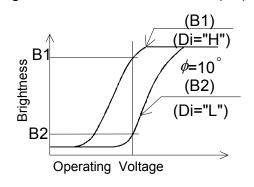


Note 2. Definition of viewing angle $\phi 1$ and $\phi 2$.



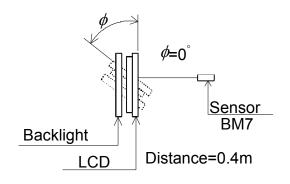

Note 4. Definition of optical response

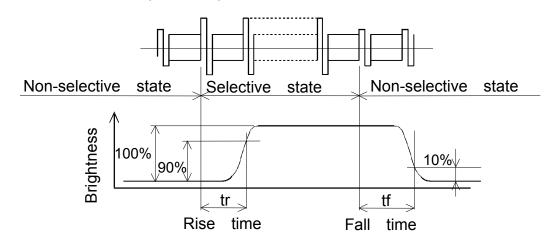

KAO	HSIUNG HITACHI		Mar 06 '00	Sh.	7D64D6 2706 6D44Q002 C4 0	DACE	6-1/2
ELEC	CTRONICS CO.,LTD.	DATE	Mar.06,'09	No.	7B64PS 2706-SP14Q002-C1-9	PAGE	0-1/2

6.2 OPTICAL CHARACTERISTICS OF BACKLIGHT

ITEM	MIN.	TYP.	MAX.	UNIT	NOTE
Drightness		140		cd/m ²	IL=5mA
Brightness	-	140 - 33/11		Note 1,2	
Diag Time		F		minuto	IL=5mA
Rise Time	-	5	-	minute	Brightness 80%
Brightness Uniformity	-	-	±30	%	Note 1,3

CFL : Initial, Ta=25°C


Display data should be all "ON".

The LCD driving voltage should be adjusted at the voltage where the peak contrast is obtained.

Note 1 Measurement after 10 minutes of CFL operating.


Note 2 Brightness control: 100%

Note 3 Measure of the following 9 places on the display.

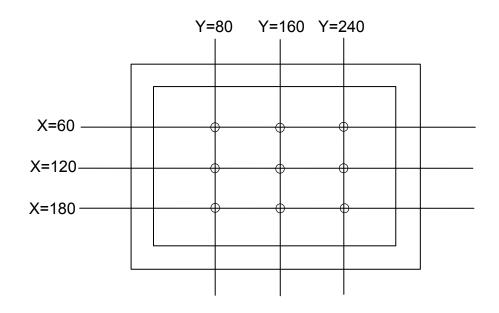


Definition of the brightness tolerance.

KAOHSIUNG HITACHI	DATE	Mar 00 100	Sh.	7D04D0 0700 0D440000 04 0	DACE	6-2/2
ELECTRONICS CO.,LTD.	DATE	Mar.06,'09	No.	7B64PS 2706-SP14Q002-C1-9	PAGE	0-2/2

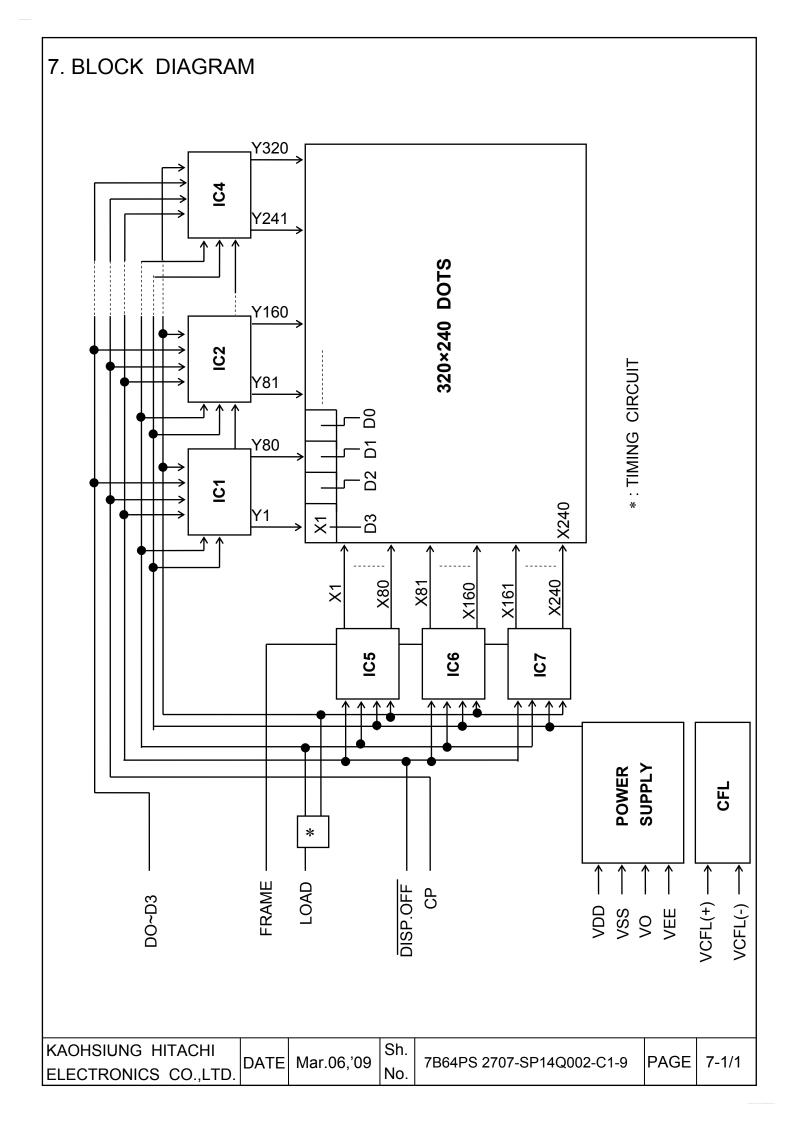

8. INTERFACE TIMING CHART


8.1 INTERFACE TIMING CHART

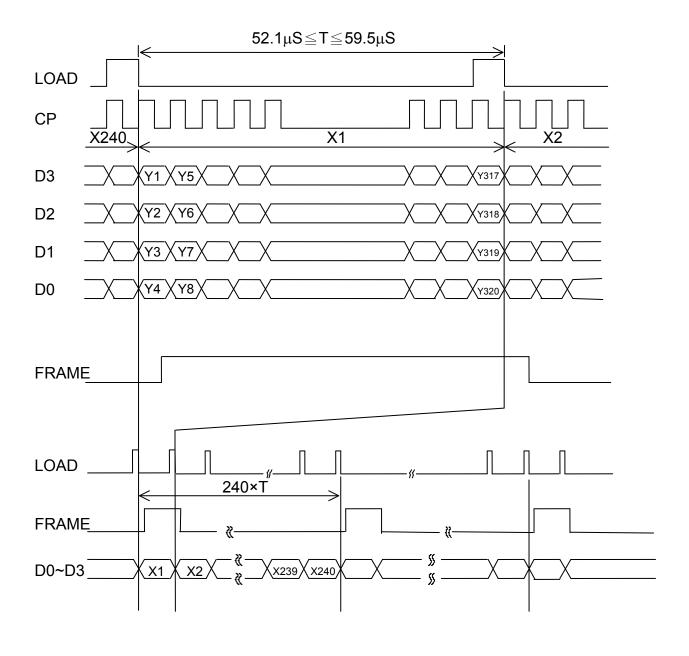

KAOHSIUNG HITACHI	DATE	Mar.06,'09	Sh.	7D64D6 2709 SD14O002 C1 0	PAGE	8-1/3
ELECTRONICS CO.,LTD.	DATE	Wai.00, 09	No.	7B64PS 2708-SP14Q002-C1-9	FAGE	6-1/3


8.2 TIMING CHARACTERISTICS

ITEM	SYMBOL	MIN.	TYP.	MAX.	UMIT
Clock frequency	fCP	1	-	6.5	MHz
Clock pulse width	tW	45	-	ı	ns
Clock rise, fall time	tr,tf	ı	-	15	ns
Data set up time	tDSU	30	-	ı	ns
Data hold time	tDHD	30	-	ı	ns
Load set up time	tLSU	80	-	ı	ns
Load clock time	tLC	120	-	ı	ns
"FRAME" set up time	tSETUP	100	-	ı	ns
"FRAME" hold time	tHOLD	100	-	-	ns
"LOAD" pulse width	tWC	125	-	ı	ns

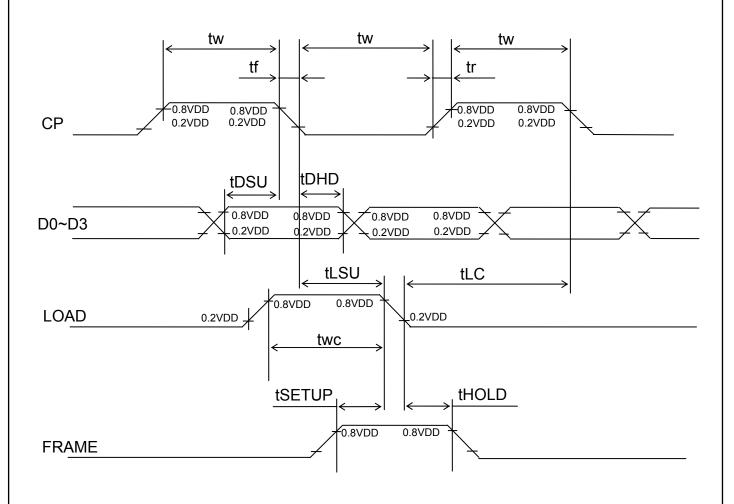

KAOHSIUNG HITACHI	DATE	Mar.06,'09	Sh.	7B64PS 2708-SP14Q002-C1-9	PAGE	8-2/3
ELECTRONICS CO.,LTD.	DATE	Wai .00, 09	No.	7B04F3 2708-3F 14Q002-C1-9	I AGE	0-2/3

8.3 POWER ON/OFF TIMING SEQUENCE

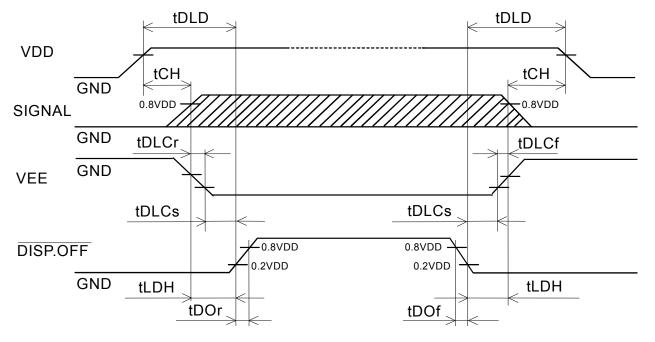


SYMBOL	MIN.	MAX.	UNIT	COMMENT
tDLD	50	-	ms	
tCH	0	30	ms	(Note 1)
tLDH	0	-	ms	
tDOr	-	100	ns	
tDOf	-	100	ns	
tDLCr	0	-	ms	(Note 2)
tDLCf	0	-	ms	
tDLCs	20	-	ms	

Note 1 Please keep the specified sequence because wrong sequence may cause permanent damage to the LCD panel.

Note 2 HITACHI recommends you to use DISP.OFF function.

display quality may deteriorate if you don't use DISP.OFF function.


8.4 POWER SUPPLY FOR LCM (EXAMPLE)

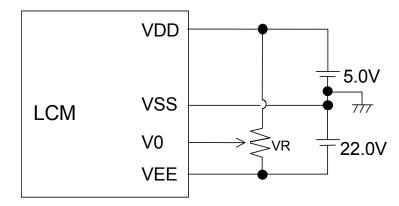


Note 1 : $VR : 10k\Omega$

							1
KAOHSIUNG HITACHI	DATE	Mar.06,'09	Sh.	7B64PS 2708-SP14Q002-C1-9	PAGE	8-3/3	
ELECTRONICS CO.,LTD.	DAIL	Wai .00, 09	No.	7 BO41 3 2700-31 14Q002-31-9	I AGE	0 3/3	

9. OUTLINE DIMENSIONS 167.0 ±0.5 160.0 ±0.5 152.0 ±0.3 (122.0) (200.0) 120.0 min. 21.0 max. 0.36x319+0.345=115.185

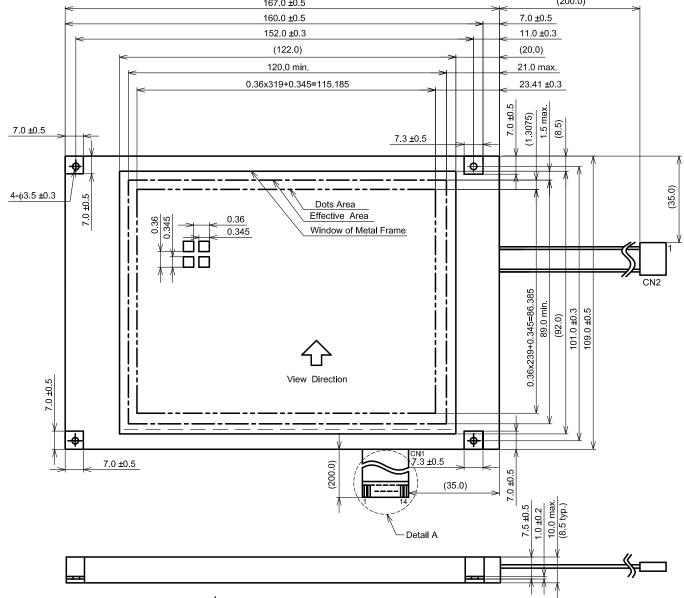

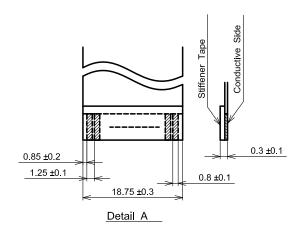


Note(1) Measurement when adding 9.8 x 10 ⁴Pa at the measuring point.

Scale : NTS Unit : mm

KAOHSIUNG HITACHI	DATE	Mar 06 '09	Sh.	7B63PS2709-SP14Q002-C1-9	PAGE	0 1/2
ELECTRONICS CO.,LTD.		I Wiai 100, 00	No.	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	I AGE	9-1/2

9.2 DISPLAY PATTERN

115.185 (320 dots)

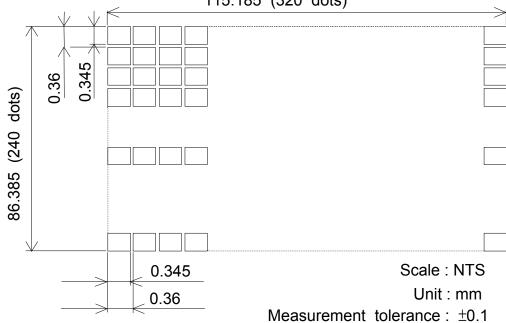

9.3 INTERFACE PIN CONNECTION

FPC: pitch 1.25mm 14 pins

INTER	RFACE	PIN No.	SIGNAL	LEVEL	FUNCTION
LCM	CN1	1	D0	H/L	Display Data
		2	D1		
	3		D2		
	4		D3		
		5	DISP.OFF	H/L	H:ON / L:OFF
	6		FRAME	Н	First Line Marker
	7		N.C	-	-
		8	LOAD	H→L	Data Latch
		9	CP	H→L	Data Shift
		10	VDD	-	Power Supply for Logic
		11	VSS	-	GND
	12		VEE	-	Power Supply for LC
		13	V0	-	Operating Voltage LC Driving
		14	VSS	-	GND

INTER	INTERFACE PIN No.		SIGNAL	LEVEL	FUNCTION
LCM	LCM CN2 1		VCFL(+)	-	Power Supply for CFL
		2	N.C	-	-
		3	N.C	-	-
		4	VCFL(-)	-	CFL GND

CFL I/F: J.A.E./ IL - G - 4S - S3C2

KAOHSIUNG HITACHI	DATE	Mar.06,'09	Sh.	7B64PS 2709-SP14Q002-C1-9	PAGE	9-2/2
ELECTRONICS CO.,LTD.			No.			


10. APPEARANCE STANDARD

10.1 APPEARANCE INSPECTION CONDITIONS

Visual inspection should be done under the following condition.


- (1) The inspection should be done under in the dark room.
- (2) The CFL should be lighted with the prescribed inverter.
- (3) The distance between eyes of an inspector and the LCD module is 25cm.
- (4) The viewing zone is shown the figure.

Viewing angle ≤25°

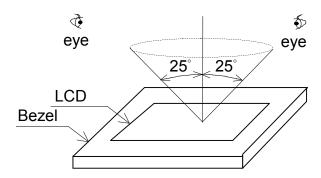

10.2 DEFINITION OF EACH ZONE

A zone: Within the effective area specified at page 9-1/2 of this document. B zone: Area between the window of metal frame and the effective area line specified at page 9-1/2 of this document.

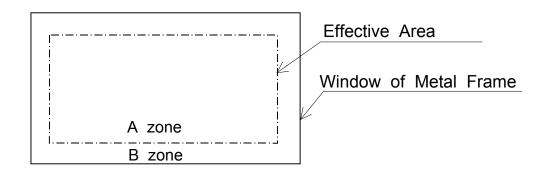

KAOHSIUNG HITACHI	DATE	Mar.06,'09	Sh.	7B64PS 2710-SP14Q002-C1-9	PAGE	10 1/3
ELECTRONICS CO.,LTD.	DATE	Wai .00, 09	No.	7 B04F3 27 10-3F 14Q002-C1-9	FAGE	10-1/3

10.3 APPEARANCE SPECIFICATION

*) If a problem occurs in respect to any of these items, both parties (Customer and HITACHI) will discuss in more detail.

No.	ITEM	CRITERIA								
	Scratches	Distinguished of					*	-		
		(To be judged		limit sa	mple)					
	Dent	Same as above					*	-		
	Wrinkles in Polarizer	Same as above	/e				*	-		
	Bubbles	Average of		Ma	ıximun	n number				
		D(m			accep					
			≦0.2			ore				
		0.2 <d< td=""><td></td><td colspan="3">12</td><td></td><td>-</td></d<>		12				-		
		0.3 <d< td=""><td>≦0.5</td><td colspan="3">3</td><td></td><td></td></d<>	≦0.5	3						
		0.5<[)		NO	NE				
	Stains,		Filamentous							
	Foreign Materials,	Length	Width	ı	Maxi	mum number		-		
	Dark Spot	L(mm)	W(mn	າ)	8	acceptable				
		L≦2.0	W≦0	.03		Ignore				
		L≦3.0	0.03 <w≦0< td=""><td>.05</td><td></td><td>6</td><td></td><td></td></w≦0<>	.05		6				
L		L≦2.5	0.05 <w<0.< td=""><td colspan="5">).05<w<0.1 1<="" td=""></w<0.1></td></w<0.<>).05 <w<0.1 1<="" td=""></w<0.1>						
			Rou							
		Average diameter	Maximum r	number	I	Minimum				
С		D(mm)	accepta	ble		Space				
		D<0.2 Ignore		е		-		-		
		0.2 ≦D<0.33 8				10mm				
		0.33≦D	None			-				
D		Total	Filamentous							
		Those wiped of	out easily are	accepta	able					
	Color Tone	To be judged	by HITACHI	limit sar	imit sample			-		
	Color Uniformity	Same as above	e					-		
	Pinhole	Average of		Ma	ximum	number				
		D(m			accep					
			0.15		lgn					
		0.15 <d≦< td=""><td></td><td></td><td>1</td><td>0</td><td></td><td></td></d≦<>			1	0				
		C≦	0.015			ore				
	Contrast	Average	Contrast	Maxim		Minimum		-		
	Irregularity	diameter		numb		Space				
	(Spot)	D(mm)		accepta			_			
		D≦0.25	To be	Ignore			_			
		0.25 <d≦0.35< td=""><td>judged by</td><td colspan="2">10</td><td>20mm</td><td> </td><td></td></d≦0.35<>	judged by	10		20mm				
		0.35 <d≦0.5< td=""><td>HITACHI</td><td>4</td><td></td><td>20mm</td><td> </td><td></td></d≦0.5<>	HITACHI	4		20mm				
		0.5 <d< td=""><td></td><td>Non</td><td>е</td><td>-</td><td></td><td></td></d<>		Non	е	-				


							4
KAOHSIUNG HITACHI	DATE	Mar.06,'09	Sh.	7B64PS 2710-SP14Q002-C1-9	PAGE	10-2/3	
ELECTRONICS CO.,LTD.	-, \ -		No.				ı

No.	ITEM		CRIT	ERIA		Α	В
	Contrast Irregularity (Line)	Width D(mm)	Length L(mm)	Maximum number acceptable	Minimum Space		
L	(Filamentous)	W≦0.25	L≦1.2	2	20mm		
С		W≦0.2	L≦1.5	3	20mm		-
D		W≦0.15	L≦2.0	3	20mm		
		W≦0.1	L≦3.0	4	20mm		
		TO	TAL	6			
	Rubbing Scratch	To be judged	by HITACHI	standard			-

No.	ITEM	CRITERIA					
С	Dark Spots, White Spots	D≦	0.4	Ignore			
F	Foreign Materials (Spot)	D>	0.4	None			
L		W≦0.2	L<2.5	≦1			
	Foreign Materials (Line)	W≦0.2	L>2.5	None			
В		W>	0.2	None			
/		W≦	0.1	Ignore			
L	Scratches	0.1 <w≦0.2< td=""><td>L≦11.0</td><td>≦1</td></w≦0.2<>	L≦11.0	≦1			
		0.1 <w≦0.2< td=""><td>L≧11.0</td><td>None</td></w≦0.2<>	L≧11.0	None			
		W<	0.2	None			

Note

(1) Definition of average diameter D




$$D = \frac{a+b}{2}$$

(2) Definition of length L and width W



(3) Definition of pinhole



c : Salience

KAOHSIUNG HITACHI	DATE	Mar 06 '00	Sh.	7DC4DC 2740 CD440002 C4 0	PAGE	10 2/2
ELECTRONICS CO.,LTD.	DATE		No.	7B64PS 2710-SP14Q002-C1-9	PAGE	10-3/3

11. PRECAUTION IN DESIGN

11.1 LC DRIVING VOLTAGE (VEE) AND VIEWING ANGLE RANGE Setting VEE out of the recommended condition will be a cause for a change of viewing angle range.

11.2 CAUTION AGAINST STATIC CHARGE

As this module contains C-MOS LSIs, it is not strong against electrostatic discharge. Make certain that the operator's body is connected to the ground through a list band etc. And don't touch I/F pins directly.

11.3 POWER ON SEQUENCE

Input signals should not be applied to LCD module before power supply voltage is applied and reaches to specified voltage (VDD).

If above sequence is not kept, C-MOS LSIs of LCD modules may be damaged due to latch up phenomenon

11.4 PACKAGING

- (1) No leaving product is preferable in the place of high humidity for a long period of time. For their storage in the place where temperature is 35 °C or higher, special care to prevent them from high humidity is required. A combination of high temperature and high humidity may cause them polarization degradation as well as bubble generation and polarizer peel-off. Please keep the temperature and humidity within the specified range for use and storage.
- (2) Since polarizers tend to be easily damaged, They should be handled full with care so as not to get them touched, pushed or rubbed.
- (3) As the adhesives used for adhering polarizers are made of organic substances which will be deteriorated by a chemical reaction with such chemicals as acetone, toluene, ethanol and isopropyl-alcohol. The following solvents are recommended for use:

 Normal hexane

Please contact us when it is necessary for you to use chemicals.

(4) Lightly wipe to clean the dirty surface with absorbent cotton waste or other soft material like chamois, soaked in the chemicals recommended without scrubbing it hardly. To prevent the display surface from damage and keep the appearance in good state, it is sufficient, in general, to wipe it with absorbent cotton.

KAOHSIUNG HITACHI		Mar 06 '00	Sh.	7B64PS 2711-SP14Q002-C1-9	DAGE	11 1/2
ELECTRONICS CO.,LTD.	DATE	Mar.06,'09	No.	7B04P3 2711-3P14Q002-C1-9	PAGE	11-1/3

- (5) Immediately wipe off saliva or water drop attached on the display area because its long period adherence may cause deformation or faded color on the spot.
- (6) Foggy dew deposited on the surface due to coldness will be caused for polarizer damage, stain and dirt on product. When necessary to take out the products from some place at low temperature for test, etc. It is required for them to be warmed up in a container once at the temperature higher than that of room.
- (7) Touching the display area and contact terminals with bare hands and contaminating them are prohibited, because the stain on the display area and poor insulation between terminals are often caused by being touched by bare hands.
 (Some cosmetics are detrimental to polarizers.)
- (8) In general the quality of glass is fragile so that it tends to be cracked or chipped in handling, specially on its periphery. Be careful not to give it sharp shock caused by dropping down, etc.

11.5 CAUTION FOR OPAERATION

- (1) It is an indispensable condition to drive LCDs within the specified voltage limit since the higher voltage than the limit causes the shorter LCD life. An electrochemical reaction due to direct current causes LCDs undesirable deterioration, so that the use of direct current driver should be avoided.
- (2) Response time will be extremely delayed at lower temperature than the operating temperature range and on the other hand at higher temperature LCDs show dark blue color in them. However those phenomena do not mean malfunction or out of order with LCDs which will come back in the specified operating temperature range.
- (3) If the display area is pushed hard during operation, some font will be abnormally displayed but it resumes normal condition after turning off once.
- (4) A slight dew depositing on terminals is a cause for electrochemical reaction resulting in terminal open circuit. Usage under the relative condition of 40°C 50%RH or less is required.

KAOHSIUNG HITACHI	DATE	N4 00 100	Sh.	7D04D0 0744 0D440000 04 0		44.0/0
ELECTRONICS CO.,LTD.	DATE	Mar.06,'09	No.	7B64PS 2711-SP14Q002-C1-9	PAGE	11-2/3

11.6 STORAGE

In case of storing for a long period of time (for instance, for years) for the purpose of replacement use, the following ways area recommended.

- (1) Storage in a polyethylene bag with the opening sealed, so the fresh air will not be entered from outside.
- (2) Placing in a dark place where neither exposure to direct sunlight nor light is, keeping temperature in the range from 0 $^{\circ}$ C to 35 $^{\circ}$ C.
- (3) Storing with no touch on polarizer surface by anything else. (It is recommended to store them as they have been contained in the inner container at the time of delivery from us.)

11.7 SAFETY


- (1) It is recommendable to crash damaged or unnecessary LCDs into pieces and wash off liquid crystal by either of solvents such as acetone and ethanol, which should be burned up later.
- (2) When any liquid leaked out of a damaged glass cell comes in contact with your hands, please wash it off well with soap and water.

KAOHSIUNG HITACHI		Mar 06 '00	Sh.	7B64PS 2711-SP14Q002-C1-9	DAGE	11 2/2
ELECTRONICS CO.,LTD.	DATE	Mar.06,'09	No.	7604P3 2711-3P14Q002-C1-9	FAGE	11-3/3

12. DESIGNATION OF LOT MARK

12.1 LOT MARK

Lot mark is consisted of 5 digits for production lot and 6 digits for production control.

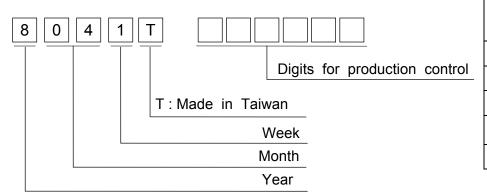

Year	Figure in
	lot mark
2009	9
2010	0
2011	1
2012	2
2013	3

Mareth	Figure in	N/Love the	Figure in			
Month	lot mark	Month	lot mark			
Jan.	01	Jul.	07			
Feb.	02	Aug.	08			
Mar.	03	Sep.	09			
Apr.	04	Oct.	10			
May	05	Nov.	11			
Jun.	06	Dec.	12			

Week	Figure in
(day in calendar)	lot mark
1~ 7	1
8~14	2
15~21	3
22~28	4
29~31	5

12.2 SERIAL No.


Serial No. is consisted of 6 digits number (000001~999999).

12.3 LOCATION OF LOT MARK

Label is bring attached on the back side of module.

12.4 REVISION(Rev.) CONTROL

Rev No.	ITEM
	Mcount IC:MN73099HED(Panasonic)
_	Transistor:2SA1036K(ROHM)
В	Mcount IC:IT7001M(ITE)
	Transistor:2SA1576(ROHM)

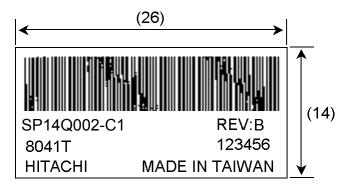

KAOHSIUNG HITACHI		Mar 06 '00	Sh.	7D04D0 0740 0D440000 04 0	DACE	10 1/1
ELECTRONICS CO.,LTD.	DATE	Mar.06,'09	No.	7B64PS 2712-SP14Q002-C1-9	PAGE	12-1/1

13. PRECAUTION FOR USE

- 13.1 A limit sample should be provided by the both parties on an occasion when the both parties agreed its necessity. Judgment by a limit sample shall take effect after the limit sample has been established and confirmed by the both parties.
- 13.2 On the following occasions, the handling of the problem should be decided through discussion and agreement between responsible persons of the both parties.
 - (1) When a question is arisen in the specifications.
 - (2) When a new problem is arisen which is not specified in this specifications.
 - (3) When an inspection specifications change or operating condition change in customer is reported to HITACHI, and some problem is arisen in this specification due to the change.
 - (4) When a new problem is arisen at the customer's operating set for sample evaluation in the customer site.

The precaution that should be observed when handling LCM have been explained above. If any points are unclear or if you have any request, please contact HITACHI.

KAOHSIUNG HITACHI		Mar 00 '00	Sh.	7D04D0 0740 0D440000 04 0	DACE	10 1/1	l
ELECTRONICS CO.,LTD.	DATE	Mar.06,'09	No.	7B64PS 2713-SP14Q002-C1-9	PAGE	13-1/1	l